

FEATURES:



- Half pitch 1.27mm(.050") series
- D-SUB type female connector
- For 1.27mm(.050") ribbon cable
- Panel mount receptacle assemblies
- bracket with latch block and without latch block

MATERIALS:



- Housing And Cover: Plastic thermoplastic P.B.T UL94V-0 black
- Contact: Phosphor bronze gold selective plated
- Bracketshell: Die-Cast zinc nickel plated over copper

ELECTRICAL:




- Current Rating: 1 Amp
- Insulation Resistance: 500M Ω /Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35m Ω Max
- Temperature Range: -55°C ~ +105°C

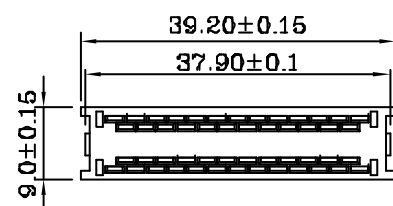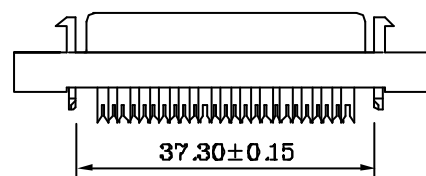


Termination Cover
(1 Places)

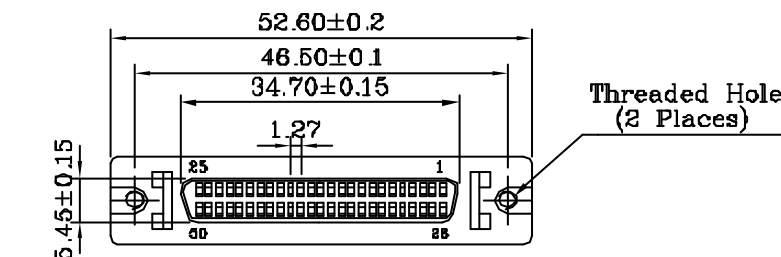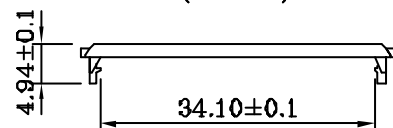

L Type

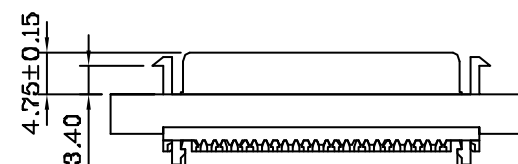

Wire Holder
(2 Places)



RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X. $\pm$

CHECKED BY GENIUS

.X $\pm$

UNIT / mm

SCALE 1 : 1

.XX $\pm$

DATE

.XXX $\pm$

ANG $\pm$

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

HPD-SFL-050-LF
SERIES
LEADFREE
50 WAY
LOCK
IDC
FEMALE

DESCRIPTION: Half Pitch D-SUB 50P Female Connector I.D.C Type For Ribbon Cable

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com