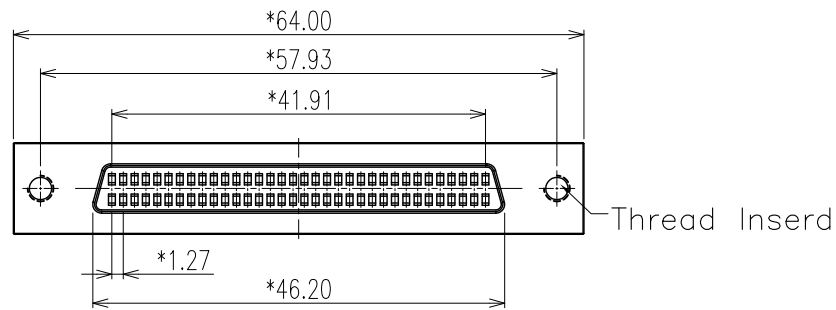


W/O Latch Type

Specifications:

Current Rating:0.5 Amp

Contact resistance:30m Ohm Max.

Insulator resistance:1000M ohm min.

Operating Temperature Range:-40°~+105°C

Flat Ribbon Cable With 0.635mm Pch.

Material And Finish

Insulator:PBT&Glass-fiber reinforced UL94V-0

Insulator Color:Black

Contact:Phosphor Bronze

Contact Plating:See Contact Plating Tab.

Note:(*)Marked is Important DIM For QC.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

HPD-SFX-068-LF
SERIES | LEADFREE
68 WAY
NON LOCK
IDC
FEMALE

DESCRIPTION: 1.27mm Pitch SCSI-III Female IDC Type Series