





• MATERIALS:(RoHS Compliant)

Housing And Cover: Plastic Thermoplastic
P.B.T UL94V-0 Black
Contacts: Phosphor Bronze Gold
Selective Plated
Front Shell: Steel Nickel Plated
Over Copper
Bracket: Steel Nickel Plated
Over Copper
Boardlock: Brass Tin Plated
Over Copper

• ELECTRICAL CHARACTERISTICS:

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: >500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature: -55°C ~ +105°C

Circuits	A	B	C	D
20	33.50	27.45	15.64	11.43
26	37.21	31.24	19.46	15.24
40	46.00	40.15	28.25	24.13
50	52.43	46.50	34.70	30.48
68	63.86	57.93	46.13	41.91

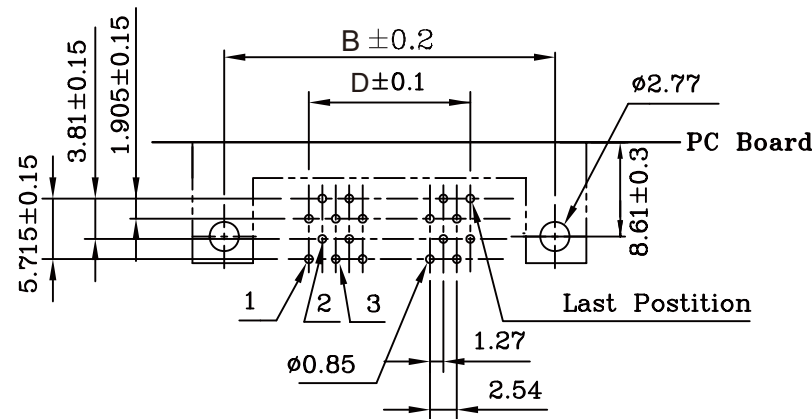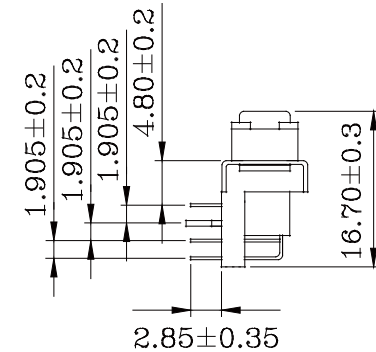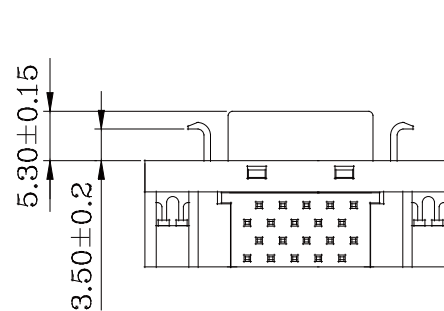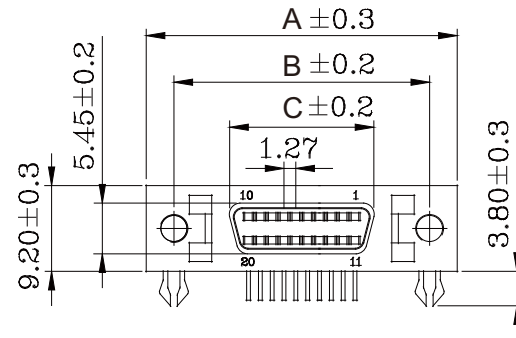

PCB LAYOUT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±



ORDER INFORMATION

HPD-SRL-xxx-LF

SERIES
LEADFREE
020~068WAY
LOCK
DIP 90°
FEMALE

DESCRIPTION: 1.27mm (.050") Pin Type
Receptacles Headers Right-Angle Mount Type