


NOTES

- MATERIAL:**
Housing:PBT, UL 94V-0, Color:Black.
Terminal:Copper Alloy.
Shell:Zinc Alloy.
Boardlock:Copper Alloy.
- FINISH:**
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Area.
Shell:Nickel Plated.
Boardlock:Tin Plated.
- This Product is LEAD-FREE & RoHS Compliance Product.

SPECIFICATIONS

- SCSI
- 1.1 Current Rating: 1 Ampere per Contact
- 1.2 Contact Resistance: 35 Milliohms Max.
- 1.3 Insulation Resistance: 1000 Megohms Min.
- 1.4 Dielectric Withstanding Voltage: 500 VAC(RMS)
- 1.5 Total Mating Force: 23.8 Kgf Max.
- 1.6 Total Unmating Force: 2.0 Kgf Min.
- 1.7 Operating Temperature: -55°C to +85°C

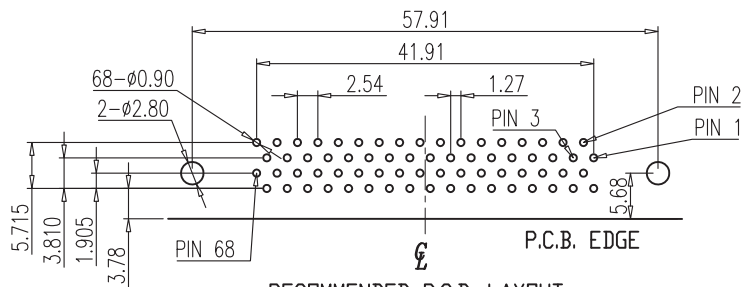

RECOMMENDED P.C.B. LAYOUT
INSPECTION DIMENSION:(A)~(J)



煜倫股份有限公司

www.morethanall.com


RoHS Compliant

DRAWING BY CY
CHECKED BY GENIUS
UNIT/ mm SCALE 1:1
DATE
SIZE A4 PPROJECTION

TOLERANCES ARE	
X. ±	
.X ±	
.XX ±	0.25
.XXX ±	0.13
ANG ±	2°

照片框

ORDER INFORMATION

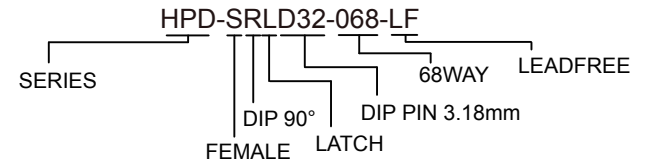

DESCRIPTION: