

● MATERIALS: (RoHS Compliant)

Housing And Cover: Plastic Thermoplastic
P.B.T UL94V-0 Black

Contacts: Phosphor Bronze Gold
Selective Plated

Front Shell: Steel Nickel Plated
Over Copper

Bracket: Steel Nickel Plated
Over Copper

Boardlock: Brass Tin Plated
Over Copper

● ELECTRICAL CHARACTERISTICS:




Contact Current Rating: 0.5 Amp

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: >500MΩ/Min

Contact Resistance: 35mΩ/Max

Operation Temperature: -55°C ~ +85°C

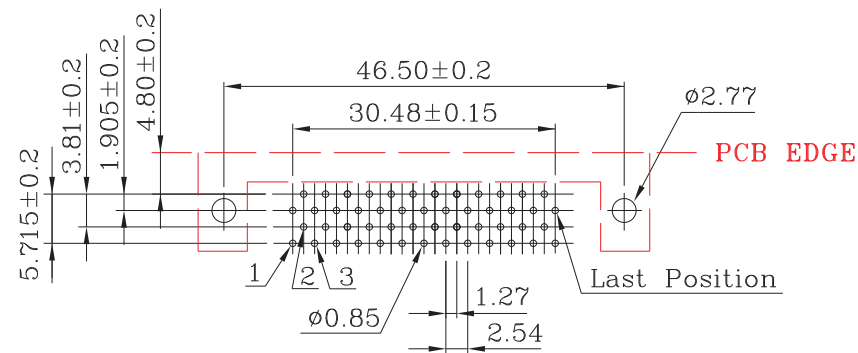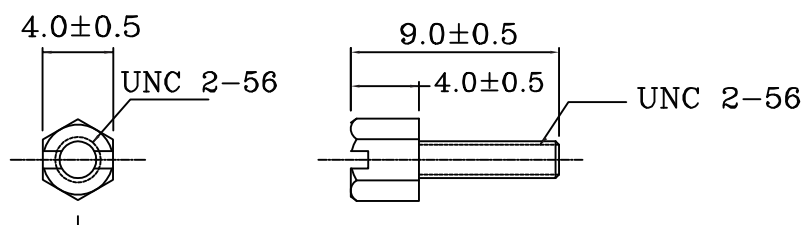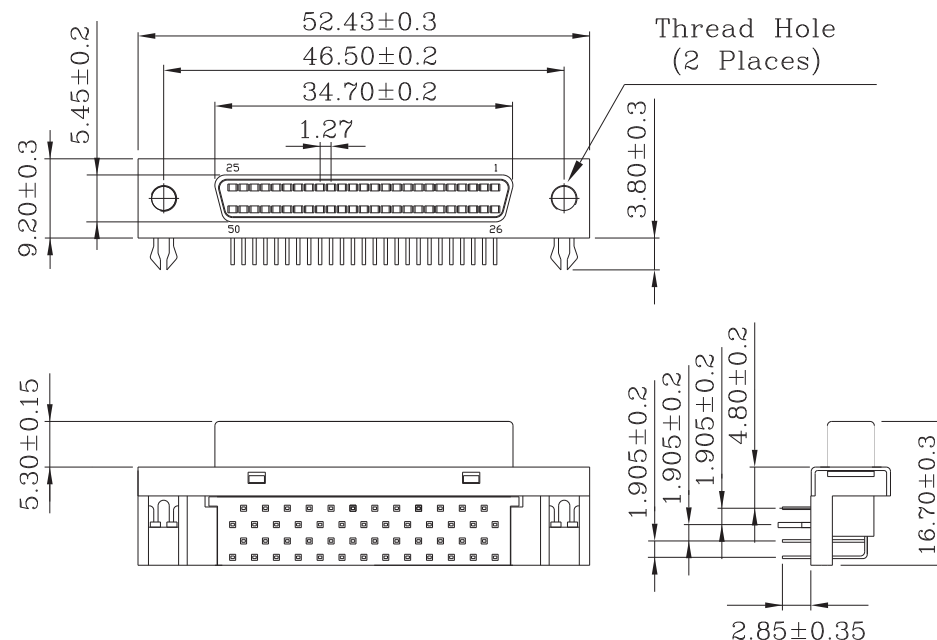

PCB Layout (A)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PJECTION

TOLERANCES ARE

X. ± 0.30

.X. ± 0.30

.XX. ± 0.20

.XXX. ± 0.20

ANG $\pm 1^\circ$

照片框

ORDER INFORMATION

HPD-SRXH-050-LF

SERIES
FEMALE
50WAY
HEX SCREW
NON LATCH
DIP 90°
LEADFREE

DESCRIPTION: 1.27mm (.050") Pin Type 50Pos
Receptacles Headers Right-Angle Mount Type