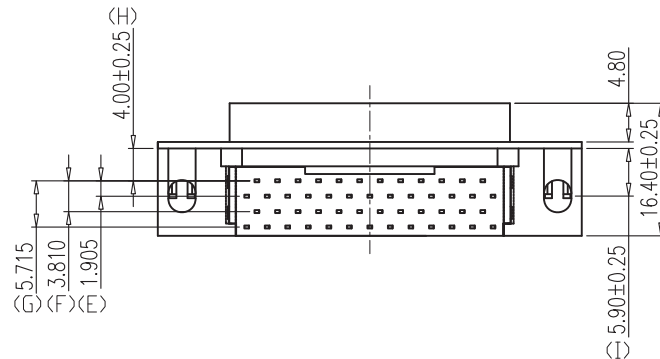

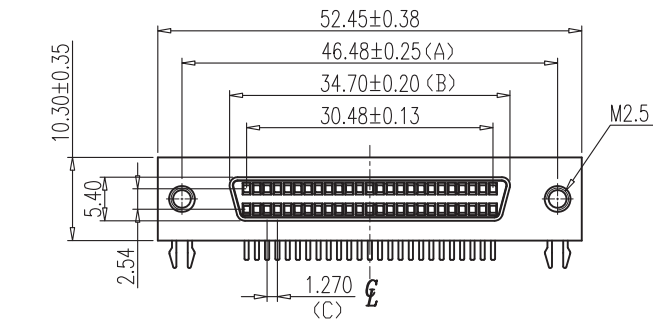


RECOMMENDED P.C.B. LAYOUT

INSPECTION DIMENSION:(A)~(I)

SPECIFICATIONS

1. SCSI
- 1.1 Current Rating: 1 Ampere per Contact
- 1.2 Contact Resistance: 35 Milliohms Max.
- 1.3 Insulation Resistance: 1000 Megohms Min.
- 1.4 Dielectric Withstanding Voltage: 500 VAC(RMS)
- 1.5 Total Mating Force: 17.7 Kgf Max.
- 1.6 Total Unmating Force: 1.6 Kgf Min.
- 1.7 Operating Temperature: -55°C to +85°C

NOTES

1. MATERIAL:
 - Housing:PBT, UL 94V-0, Color:Black.
 - Terminal:Copper Alloy.
 - Shell:Zinc Alloy.
 - Boardlock:Copper Alloy.
2. FINISH:
 - Terminal:Gold Plated over Nickel at Contact Area.
 - Tin Plated over Nickel at Solder Ared.
 - Shell:Nickel Plated.
 - Boardlock:Tin Plated.
3. This Product is LEAD-FREE & RoHS Compliance Product.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HPD-SRXM25-050-LF
SERIES | | | LEADFREE
| | | 50 WAY
| | M2.5
| NON LOCK
| DIP 90°
| FEMALE

DESCRIPTION: SCSI II PIN TYPE RIGHT ANGLE