


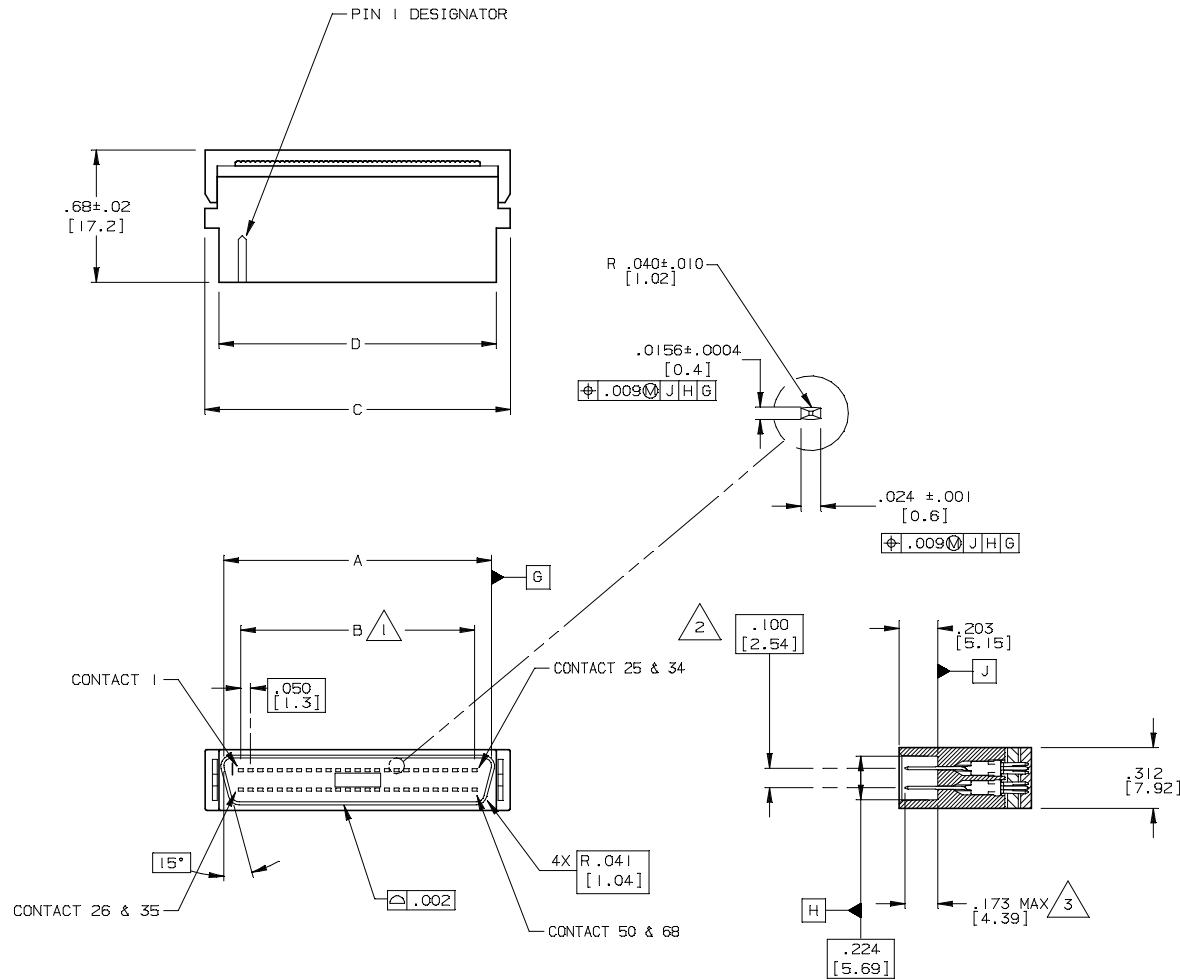

SPECIFICATION:

ENVIRONMENTAL:

EIA-364-B ENVIRONMENTAL CLASS 1.3

TEMPERATURE RANGE: -55° C TO +105° C

MECHANICAL:

INSULATOR MATERIAL: GLASS FILLED POLYESTER
COLOR BLACK, UL94V-0

CONTACT MATERIAL: PHOSPHOR BRONZE

DURABILITY: 500 CYCLES MIN.

ELECTRICAL:

CURRENT RATING: 0.5 AMP

DIELECTRIC WITHSTANDING VOLTAGE: 500 VDC FOR 1 MINUTE

INSULATOR RESISTANCE: 1000 MEGOHMS MIN.

CONTACT RESISTANCE:

25 MILLIOHMS MAX MEASURED THROUGH INSULATION DISPLACEMENT
PORTION AND MATING PIN; 15 MILLIOHMS MAX THROUGH MALE/FEMALE
CONTACT INTERFACES

TABULATION:

NO. OF POSITIONS	A		B		C		D	
	IN	MM	IN	MM	IN	MM	IN	MM
50	1.372	34.85	1.200	30.48	1.568	39.83	1.425	36.19
68	1.822	46.28	1.650	41.91	2.018	51.26	1.883	47.83

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.25
.XX ± 0.13
.XXX ± 0.10
ANG ±

照片框

ORDER INFORMATION

HPDP-PFS3-xxx-LF

SERIES

LEADFREE

050:50 WAY
068:68 WAY

THREE TYPE

IDC 0.635mm
MALE

DESCRIPTION: