



MATERIAL

Insulator : NY66+30% Glass fiber

Contact Pin : Brass




SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Dielectric Voltage : AC 500V for one minute

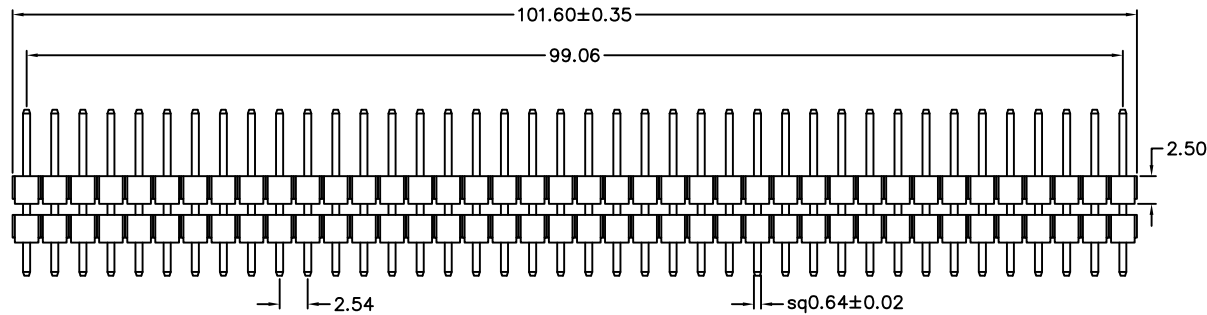

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. \pm

CHECKED BY GENIUS

.X \pm 0.30

UNIT / mm

SCALE 1 : 1

.XX \pm 0.20

DATE

.XXX \pm

ANG \pm

照片框

煜倫股份有限公司

www.morethanall.com

SIZE A4

PPOJECTION

ORDER INFORMATION

HS-D1506030-1X40-LF
SERIES | DIP 30mm | CONTACT 6.0mm | TOTAL 15.0mm | 40WAY | LEADFREE | DIP180°

DESCRIPTION: PIN HEADER 2.54*2.54mm STRAIGHT TYPE, SINGLE ROW DUAL INSULATORS