


Recommended P.C.B Layout

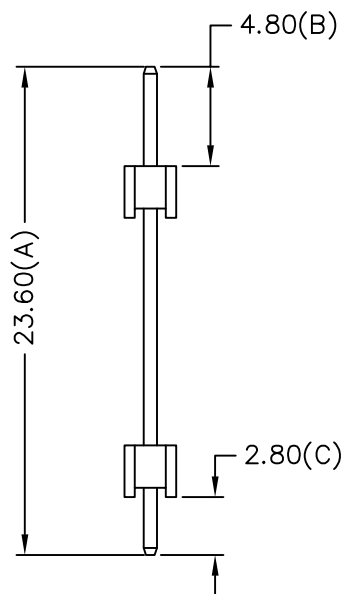

MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

HS-D2364828-1X02-LF
 SERIES | | | | LEADFREE
 | | | | 02WAY
 | | | | DIP 2.8mm
 | | | | CONTACT 4.8mm
 | | | | TOTAL 23.6mm
 | | | | DIP180°

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

DESCRIPTION: PIN HEADER 2.54*2.54mm STRAIGHT TYPE, SINGLE ROW DUAL INSULATORS