



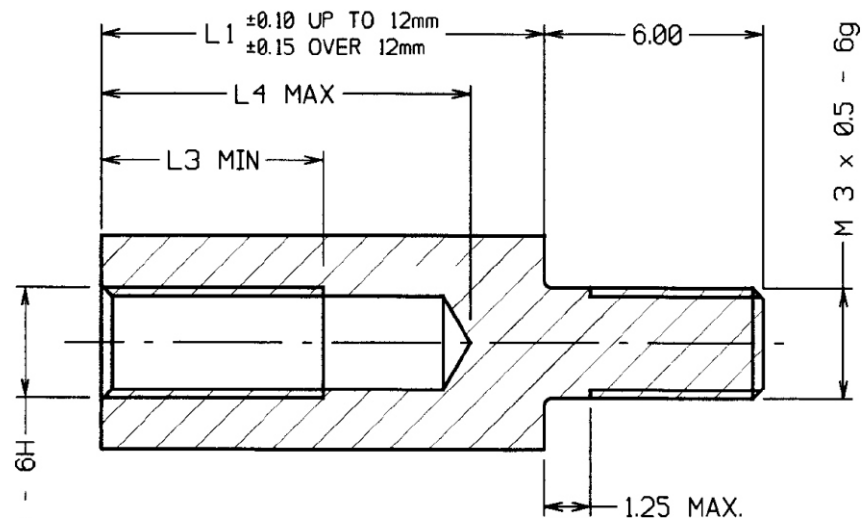

SECTION A-A

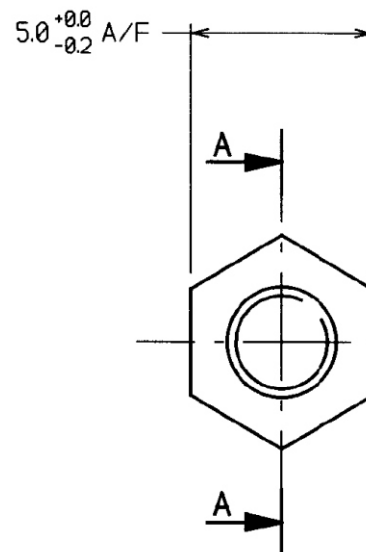

NOTES:

1. THREADS ARE MANUFACTURED IN ACCORDANCE WITH BS3643 PT.2 1981.

PART No.	L1	L3 MIN	L4 MAX	PART No.	L1	L3 MIN	L4 MAX
HS-M3-100	4.00	2.00	4.0	HS-M3-260	20.00	6.00	10.0
HS-M3-110	5.00	2.50	4.5	HS-M3-270	21.00	6.00	10.0
HS-M3-120	6.00	3.00	5.5	HS-M3-280	22.00	6.00	10.0
HS-M3-130	7.00	4.50	6.5	HS-M3-310	25.00	6.00	10.0
HS-M3-140	8.00	5.50	7.5	HS-M3-320	26.00	6.00	10.0
HS-M3-150	9.00	6.00	8.5	HS-M3-360	30.00	6.00	10.0
HS-M3-160	10.00	6.00	9.0	HS-M3-380	32.00	6.00	10.0
HS-M3-170	11.00	6.00	10.0	HS-M3-400	34.00	6.00	10.0
HS-M3-180	12.00	6.00	10.0	HS-M3-410	35.00	6.00	10.0
HS-M3-190	13.00	6.00	10.0	HS-M3-440	38.00	6.00	10.0
HS-M3-200	14.00	6.00	10.0	HS-M3-460	40.00	6.00	10.0
HS-M3-210	15.00	6.00	10.0	HS-M3-510	45.00	6.00	10.0
HS-M3-220	16.00	6.00	10.0	HS-M3-560	50.00	6.00	10.0
HS-M3-230	17.00	6.00	10.0	HS-M3-660	60.00	6.00	10.0
HS-M3-240	18.00	6.00	10.0	HS-M3-860	80.00	6.00	10.0
HS-M3-250	19.00	6.00	10.0				

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HS-M3-xxx-LF
SERIES LEADFREE
L1:100:4.0+6.0=10mm
860:8.0+6.0=86mm
M3

DESCRIPTION: