
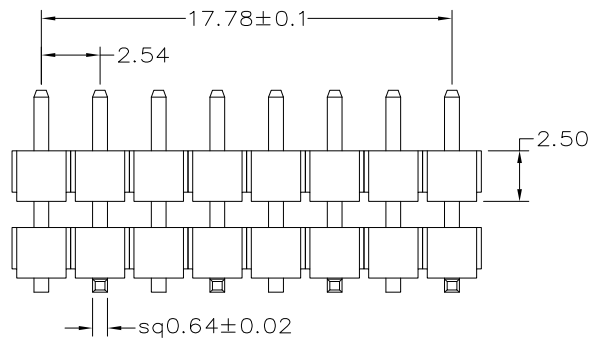
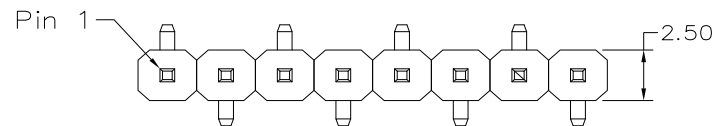


Recommended P.C.B Layout



MATERIAL

Insulator : NYLON 6T

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

HS-V070X30-1X08R-LF
SERIES
180°SMT
LEADFREE
R TYPE FOOT
08 WAY
CONTACT 3.0mm
NON POST
HIGH 7.0mm

DESCRIPTION: PIN HEADER 2.54*2.54mm SMT S/T TYPE, SINGLE ROW DUAL INSULATORS