

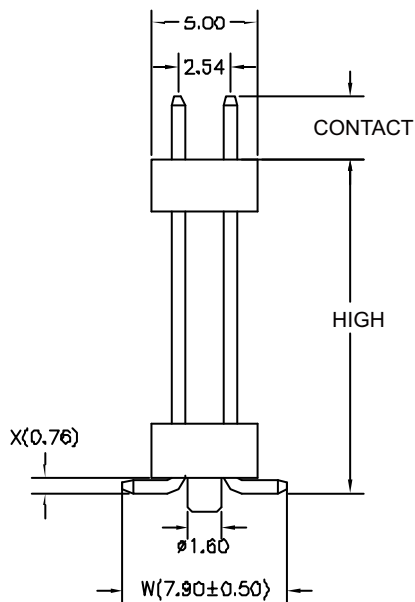
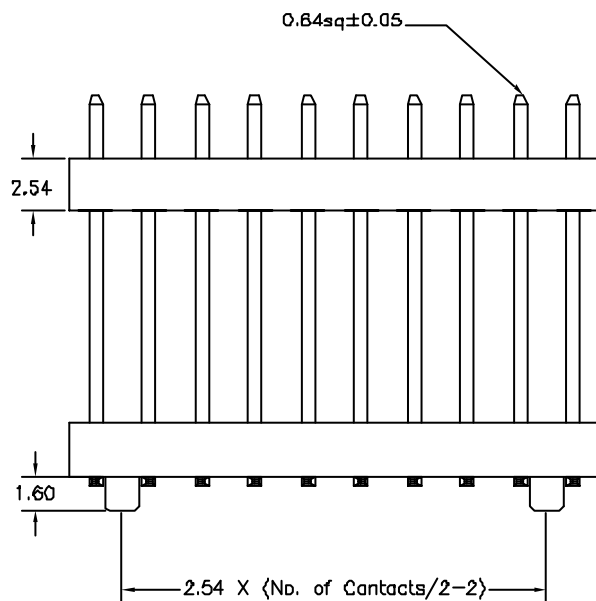


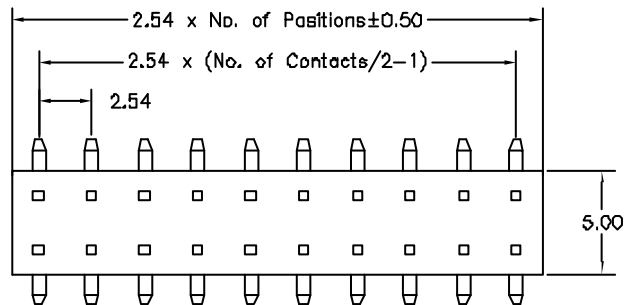

SPECIFICATIONS:
 CURRENT RATING :
 3 AMPS
 INSULATOR RESISTANCE :
 5000 M Ω MIN.
 DIELECTRIC WITHSTANDING :
 AC 1000 V
 OPERATING TEMPERATURE :
 -40 $^{\circ}$ C ~ +105 $^{\circ}$ C
 CONTACT MATERIAL:
 *STANDARD: BRASS
 INSULATOR MATERIAL:
 POLYESTER, UL 94V-0
 *STANDARD: NYLON-6T

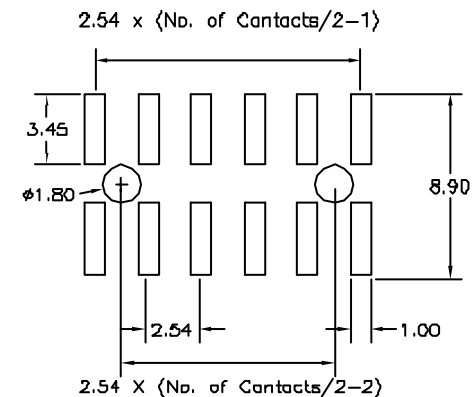

RECOMMENDED P.C.BOARD LAYOUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. $\pm$
 .X $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

HS-VxxxPxx-2Xxx-LF
 SERIES | | | LEADFREE
 180°SMT | | | CONTACT mm
 | | | NON POST
 | | | HIGH mm

DESCRIPTION: