





2.54MM PIN HEADER  
SURFACE MOUNT STACK TYPE

MATERIAL

Insulator : 30% Glass fiber PBT  
Contact Pin : Brass

SPECIFICATION

Current Rate : 1 AMP  
Insulation Resistance : 5000MΩ Min. at DC 500V  
Contact Resistance : 20mΩ Max. at DC 100mA  
Operation Temperature : -55°C to +105°C

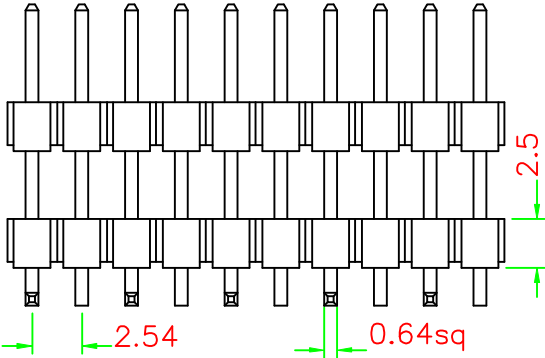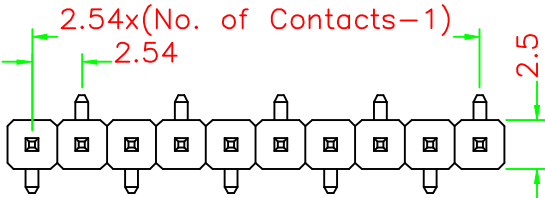

Recommended P.C.B. Layout

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

照片框

ORDER INFORMATION

HS-VxxxXxx-1XxxL-LF  
SERIES  
180°SMT  
HIGH mm  
CONTACT mm  
NON POST  
LEADFREE  
L TYPE FOOT  
1X02:02 WAY  
1X40:40 WAY

DESCRIPTION: 2.54MM PIN HEADER SMT STACK TYPE