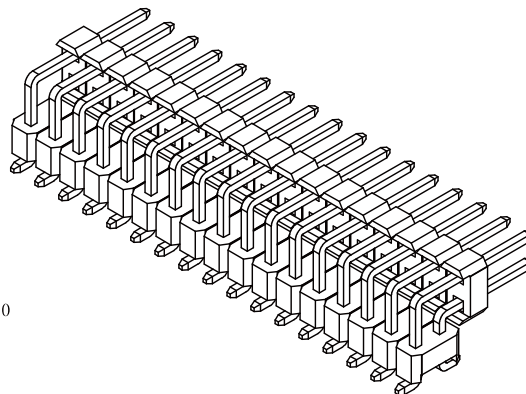
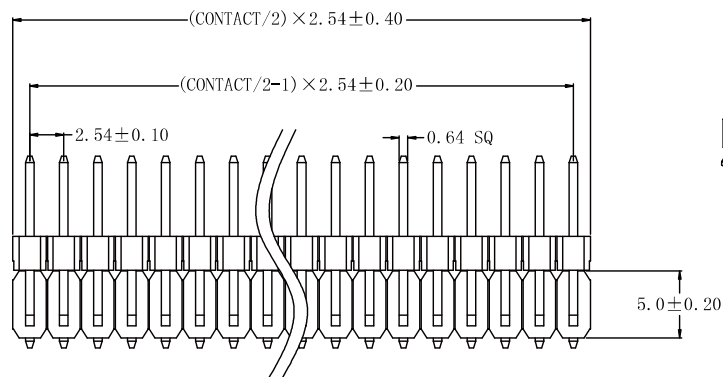


P.C.B . LAYOUT

CONTACTS	
2×2	2×22
2×3	2×23
2×4	2×24
2×5	2×25
2×6	2×26
2×7	2×27
2×8	2×28
2×9	2×29
2×10	2×30
2×11	2×31
2×12	2×32
2×13	2×33
2×14	2×34
2×15	2×35
2×16	2×36
2×17	2×37
2×18	2×38
2×19	2×39
2×20	2×40
2×21	

MATERIAL

HOUSING : NYLON 6T,UL94V-0

CONTACT : COPPER ALLOYS

PLATED : GOLD-FLASH

COLOR : BLACK

SPECIFICATION

CURRENT: 3A

OPERATING TEMPERATURE: -55°C TO +105°C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE : AC 1000V RMS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ±

照片框

ORDER INFORMATION

HS-WXH41434160-2Xxx-LF
SERIES
90°SMT
NON POST
LEADFREE
2X02:04WAY
2X40:80WAY
CONTACT 6.0mm
R/A 4.15mm
HIGH 4.18+4.36mm

DESCRIPTION: