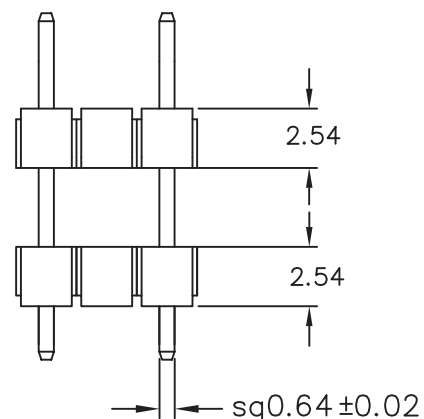
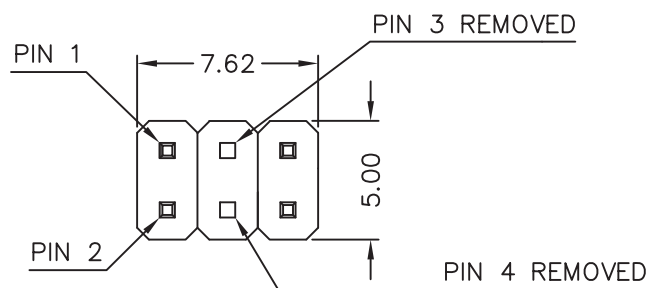


Recommended P.C.B Layout

MATERIAL

Housing : Thermoplastic UL94V-0

Contact Pin : Brass

SPECIFICATION


Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -55°C to + 105°C

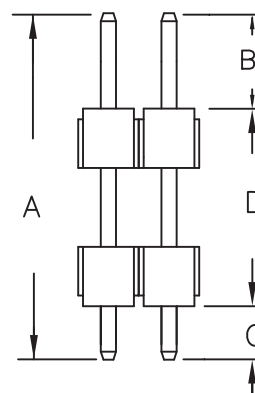

A: 23.70mm B: 2.80mm C: 5.90mm D: 15.00mm

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

ORDER INFORMATION

HSB-D2375928-2X03EE-LF
SERIES
DIP 180°
DIP 2.8mm
DIP 5.9mm
TOTAL LENGTH 23.7mm
06 WAY
LEADFREE
EMPTY EVEN PIN

DESCRIPTION: PIN HEADER 2.54*2.54mm STRAIGHT STACK