
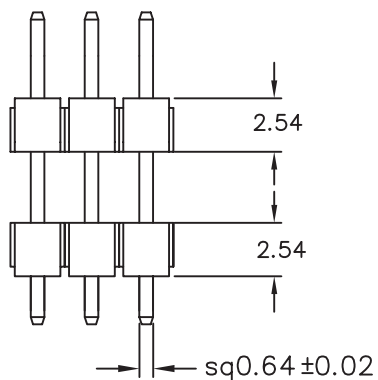
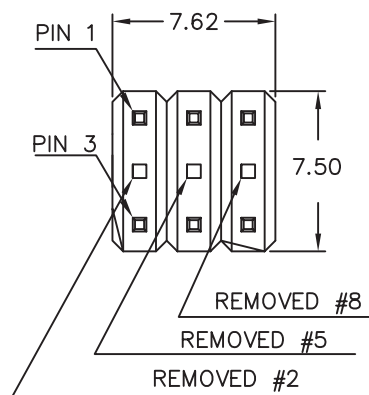


Recommended P.C.B Layout

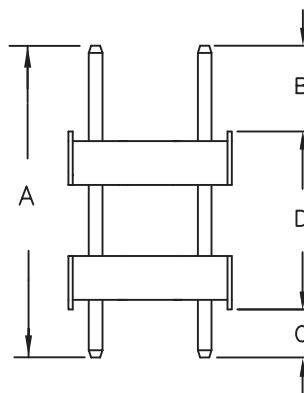

A: 23.70mm B: 2.80mm C: 5.90mm D: 15.00mm

MATERIAL

Housing : Thermoplastic UL94V-0

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -55°C to + 105°C

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

HSB-D2375928-3X03EB-LF
 SERIES | DIP 180° | DIP 2.8mm | DIP 5.9mm | 09 WAY | LEADFREE | EMPTY EVEN 2 ROW PIN
 TOTAL LENGTH 23.7mm

DESCRIPTION: PIN HEADER 2.54*2.54mm STRAIGHT STACK

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ± 3°