

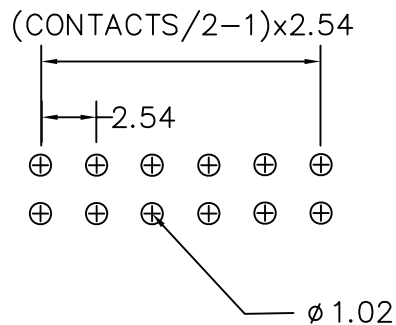
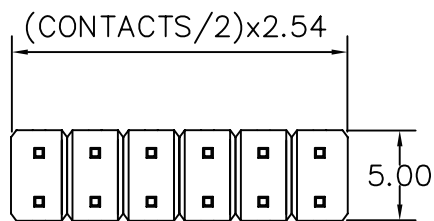


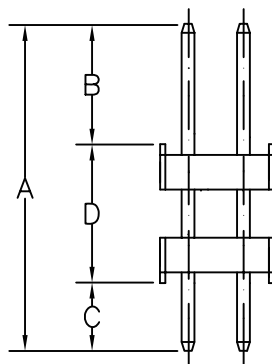

RECOMMENDED P.C.B LAYOUT

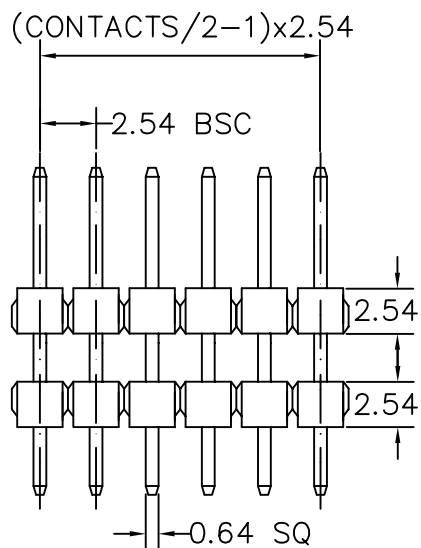

A: 26.10 mm B: 2.80 mm C: 13.20 mm D: 10.10 mm

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT: 3A

OPERATING TEMPERATURE: -55°C TO +105°C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE: AC 1000V RMS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HSB-D26113228-2Xxx-LF
SERIES
DIP180°
LEADFREE
2X02:04WAY
2X40:80WAY
DIP 2.8mm
CONTACT 13.2mm
TOTAL 26.1mm

DESCRIPTION: