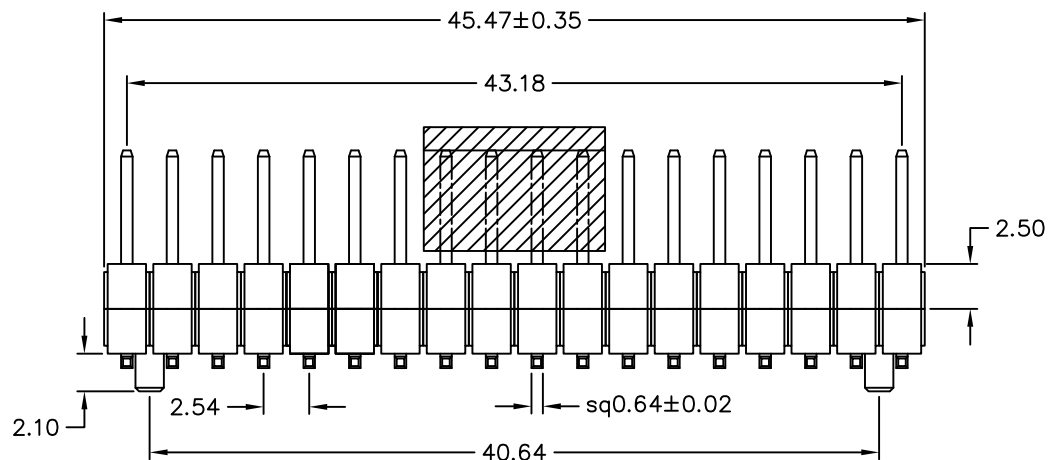
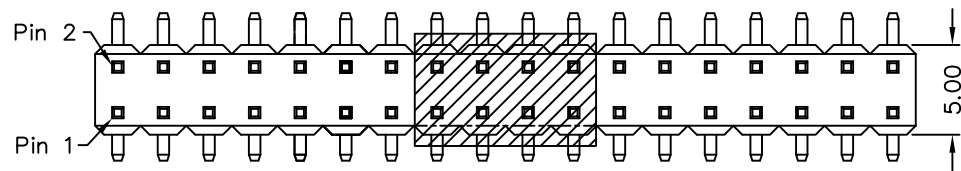


Recommended P.C.B Layout

MATERIAL

Insulator: NY6T

Contact Pin : Brass


SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

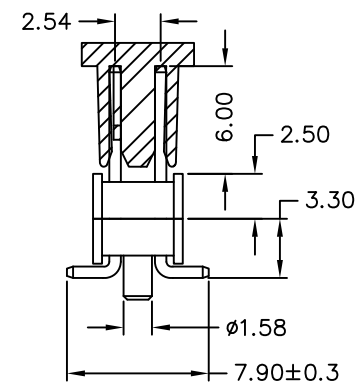

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

ORDER INFORMATION

HSB-V058P60C-2X18-LF
SERIES | | | | LEADFREE
| | | | 36 WAY
| | | | CAP
| | | | CONTACT 6.0mm
180°SMT | | | | POST
| | | | HIGH 5.8mm

DESCRIPTION: PIN HEADER 2.54*2.54mm, SMT S/T DUAL ROWS, DUAL INSULATORS CAP+T/R