
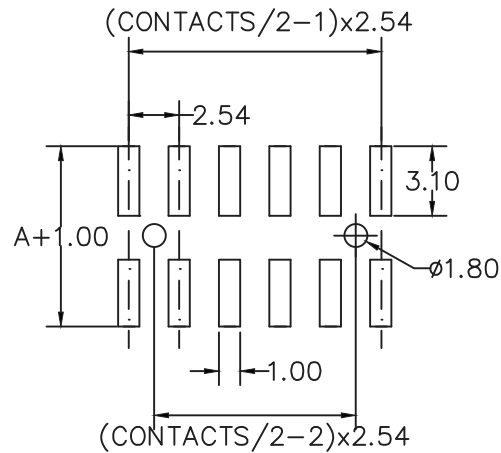


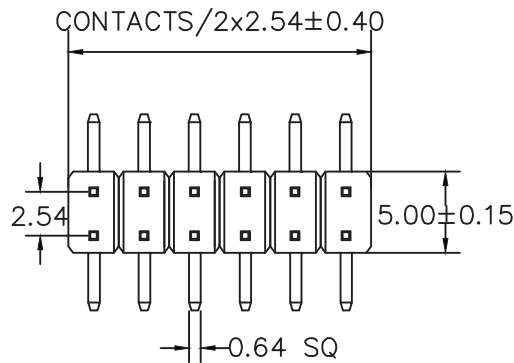

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

SPECIFICATION


CURRENT: 3A

OPERATING TEMPERATURE: -55 C TO +105 C


CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE : AC 1000V RMS

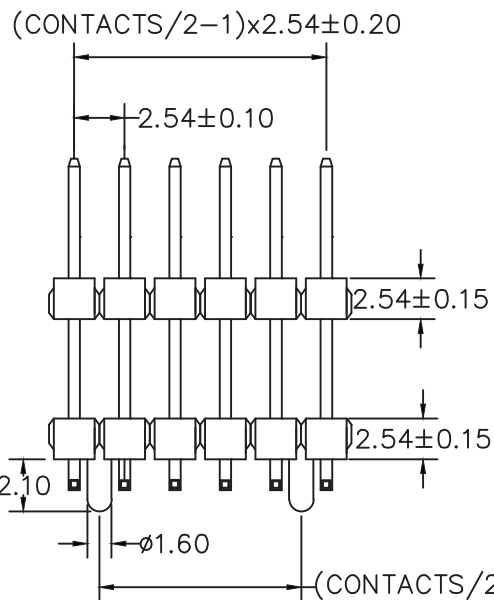

RECOMMENDED P.C.B LAYOUT

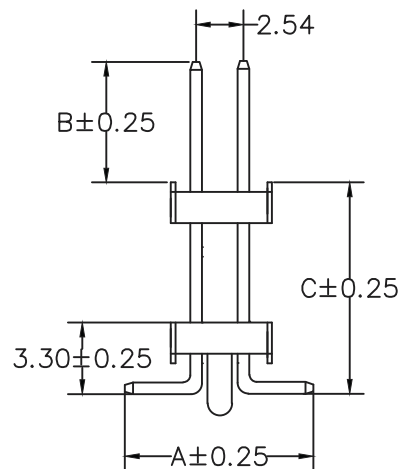

A: 7.90 mm B: 5.50 mm C: 6.30 mm

HSB-V063P55-2Xxx-LF

LEADFREE

2X03:06WAY

2X40:80WAY

RoHS Compliant

CONTACTS	
2X3	2X22
2X4	2X23
2X5	2X24
2X6	2X25
2X7	2X26
2X8	2X27
2X9	2X28
2X10	2X29
2X11	2X30
2X12	2X31
2X13	2X32
2X14	2X33
2X15	2X34
2X16	2X35
2X17	2X36
2X18	2X37
2X19	2X38
2X20	2X39
2X21	2X40

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. HSB-V063P55-2Xxx

DWG NO. HSB-V063P55-2Xxx

FILE NO.

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X. ±

.X ± 0.38

.XX ± 0.25

.XXX ±

ANG

DESCRIPTION:

AREA

REVISIONS

DATE

煜倫股份有限公司