

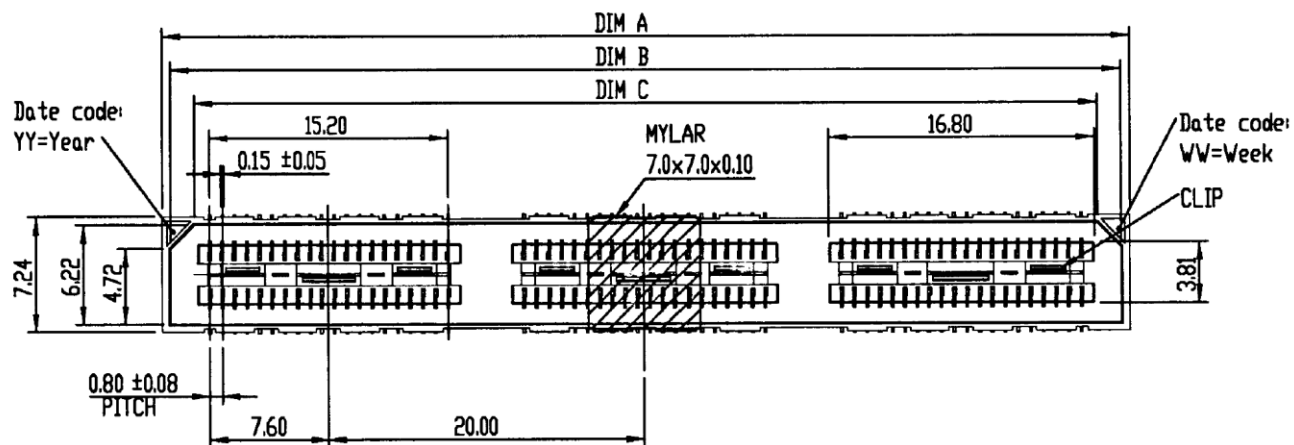
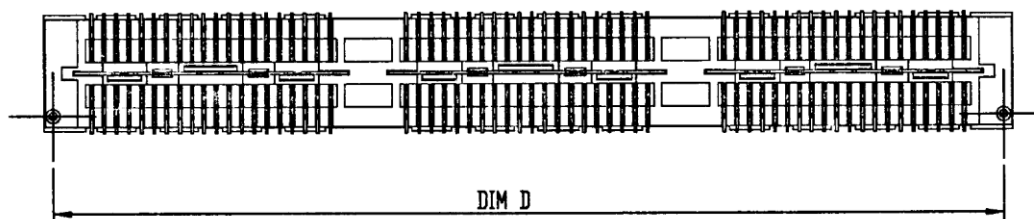




SPECIFICATION
MATERIAL
 Insulator: LCP E6808, rated UL94V-0
 Contacts: Phosphor Bronze (C5210-EH)
CONTACT PLATING
 Underplate: 50u~100u Nickel
 Contact area: 1u Gold ~ 8u Selective gold
 Solder tails area: 1u Gold
ELECTRICAL
 Current rating:
 Contact: 1.0A
 Ground Plane: 7.8A
 Operating Temp Range:
 -55°C to +125°C
 Voltage Rating:
 125VAC(5mm Stack Height)
 Mating cycles: 100 Insertions

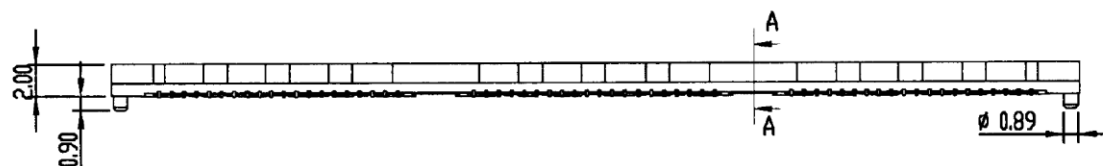

	40 PIN	80 PIN	120 PIN
DIM A	21.27	41.27	61.27
DIM B	20.17	40.17	60.17
DIM C	17.17	37.17	57.17
DIM D	20.13	40.13	60.13

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.12
 ANG ±

照片框

ORDER INFORMATION

HSNP08-S020P-xxx-LF

SERIES

LEADFREE

040.080.120WAY

POST

UNMATED HIGH 2.0mm

FEMALE

DESCRIPTION: