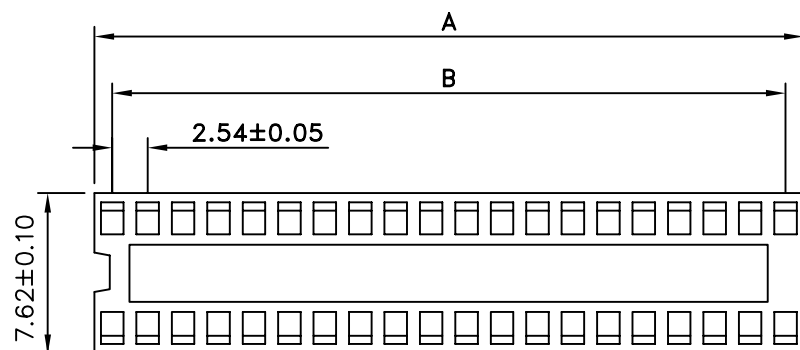


一. 膠 芯

1. 材質: PBT + 玻璃纖維

2. 顏色: 黑色

二. 端子

1. 材質: 磷銅

2. 表面處理: 端子表面鍍錫(100U" min)

3. 瞬間止推力: 每pin 至少0.5公斤

三. 電性參數:

1. 電流: 1mA

2. 耐壓: AC 1000V 5S

3. 絕緣: 1000兆姆 500V DC

4. 溫度: -55°C ~ +105°C

PART NO.	A	B	SPACING
IC-D03XB-06	7.62	5.08	0.3
IC-D03XB-08	10.16	7.62	
IC-D03XB-14	17.78	15.24	
IC-D03XB-16	20.32	17.78	
IC-D03XB-18	22.86	20.32	
IC-D03XB-20	25.40	22.86	
IC-D03XB-22	27.94	25.40	
IC-D03XB-24	30.48	27.94	
IC-D03XB-28	35.56	33.02	
IC-D03XB-32	40.64	38.10	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

IC-D03XB-xx-LF
SERIES | LEADFREE
06~32WAY
NON BRIDGE
SPACING 7.62mm
DIP 180°

DESCRIPTION: IC SOCKET 2.54MM SERIES