


Specifications:
 Current rating:1.0A AC,DC
 Voltage rating:250V AC,DC
 Contact resistance:20m ohm max
 Insulator resistance:5000M ohm min
 Dielectric withstanding voltage:1000V AC/minute
 Operating temperature:-55°C to +85°C
 Material:
 Insulator: PBT,Nylon 9T,PPS (UL 94V-0)
 Standard Color:Black
 Contacts:Phosphor Bronze
 Finish:Tin Plated

Dimension: Δ

| Circuits | DIM.A | DIM.B | DIM.C | DIM.D | Spacing |
|----------|-------|-------|-------|-------|---------|
| 6 | 7.62 | 5.08 | 10.16 | 7.62 | 03 |
| 8 | 10.16 | 7.62 | 10.16 | 7.62 | |
| 14 | 17.78 | 15.24 | 10.16 | 7.62 | |
| 16 | 20.32 | 17.78 | 10.16 | 7.62 | |
| 18 | 22.86 | 20.32 | 10.16 | 7.62 | |
| 20 | 25.40 | 22.86 | 10.16 | 7.62 | |
| 24 | 30.48 | 27.94 | 10.16 | 7.62 | 06 |
| 28 | 35.56 | 33.02 | 10.16 | 7.62 | |
| 24 | 30.48 | 27.94 | 17.78 | 15.24 | |
| 28 | 35.56 | 33.02 | 17.78 | 15.24 | |
| 32 | 40.64 | 38.10 | 17.78 | 15.24 | |
| 40 | 50.80 | 48.26 | 17.78 | 15.24 | |
| 42 | 53.34 | 50.80 | 17.78 | 15.24 | |
| 48 | 60.96 | 58.42 | 17.78 | 15.24 | |

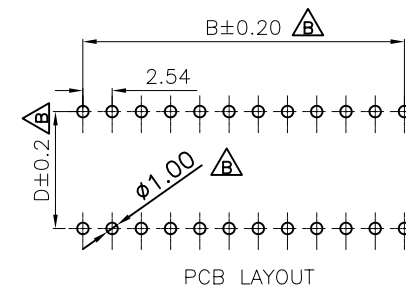

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.20
 .XX ± 0.15
 .XXX ±
 ANG ±

P PROJECTION

照片框

ORDER INFORMATION

IC-Dxx-xx-LF
 SERIES | LEADFREE
 | 06~48 WAY
 | 03:7.62mm
 | 06:15.24mm
 | DIP 180°

DESCRIPTION: 2.54mm IC Socket Stamp Pin

煜倫股份有限公司

www.morethanall.com