

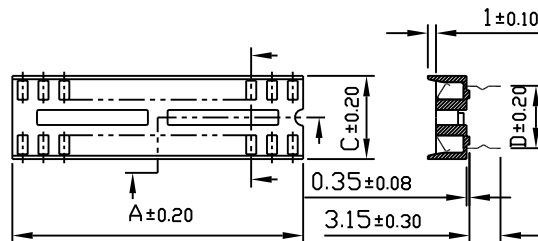



IC-D04K-xx

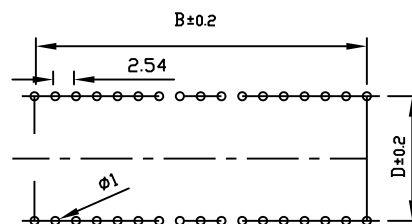

IC-D03K-xx

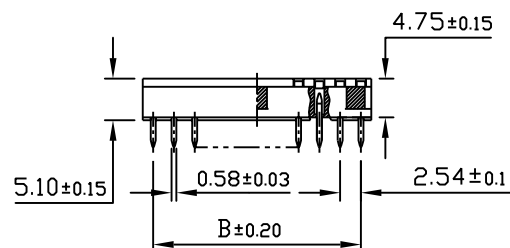

PCB LAYOUT



PART NO	CKT	A±0.20	B±0.20	C±0.20	D±0.20
IC-D03K-06	6	7.62	5.08	10.16	7.62
IC-D03K-08	8	10.16	7.62		
IC-D03K-14	14	17.78	15.24		
IC-D03K-16	16	20.32	17.78		
IC-D03K-18	18	22.86	20.32		
IC-D03K-20	20	25.40	22.86		
IC-D03K-24	24	30.48	27.94		
IC-D03K-28	28	35.56	33.02		

PART NO	CKT	A±0.20	B±0.20	C±0.20	D±0.20
IC-D04K-22	22	27.94	25.40	12.70	10.16

MATERIAL :

Contact :

Phosphor Bronze thickness 0.15mm

Plating :

Contact Plating, Tin plated 60u"~80u"

(Lead free plating)

Insulator :

PBT-4830 , UL 94V-0

SPECIFCATIONS:

Current Rating : 1A

Dielectric withstanding Voltage : 1000v RMS/minute

Insulator resistance : 5000 Megohms min.

Contact resistance : 20 milliohms initial

30 milliohms after test.

Operating temperatures : -55°c to 85°c

Insertion force : 340g(12 oz) max.per contact.

Withdrawal force : 80g(2.82 oz) min.per contact

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

IC-DxxK-xx-LF
SERIES
LEADFREE
06~28WAY
KINK
03:SPACING 7.62mm
04:SPACING 10.16mm
DIP 180°

DESCRIPTION: