

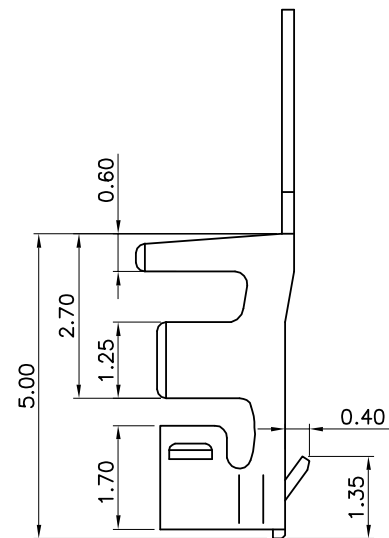
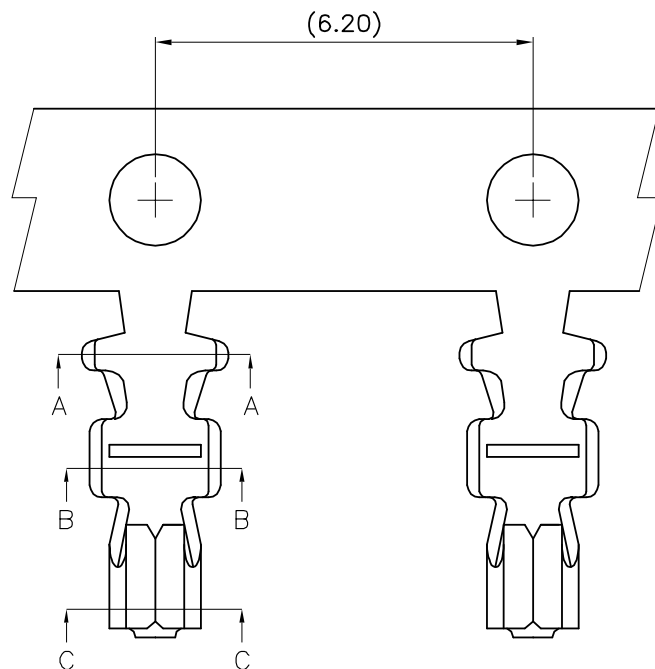


Section A-A



Section B-B

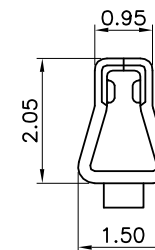

Section C-C

NOTES:

1. MATERIAL: PHOSPHOR BRONZE, $t=0.20\text{mm}$
BRASS, $t=0.20\text{mm}$
2. FINISH: A--TIN-PLATED OVER NICKEL.
AE--PRESSING BEFORE BRIGHT-TIN PLATED OVER NICKEL.
GO--GOLD FLASH OVER NICKEL.
G*--GOLD *U" OVER NICKEL.
3. APPLICABLE WIRE RANGE: AWG#24~#30
4. INSULATION O.D.: 1.40mm Max.
5. PACKING: 10K/REEL

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

$X \pm 0.30$
 $.X \pm 0.25$
 $.XX \pm 0.15$
 $.XXX \pm 0.08$
 $ANG \pm 3^\circ$

PPOJECTION

照片框

ORDER INFORMATION

ILS-T-24-LF
SERIES | LEADFREE
24~30 AWG
TERMINAL





DESCRIPTION: WIRE TO BOARD, RECEPTACLE, PITCH 2.00mm, CRIMP TYPE, CONTACT

PCAKING MATERIAL

PART NAME	DIM(mm)
CARTON	580*580*210

PCAKING CAPACITY

PART NO.	PCS/RE	RE/BC	PCS/BC
ILS-T-24	10,000 PCS/RE	8 RE/BC	80,000 PCS/BC

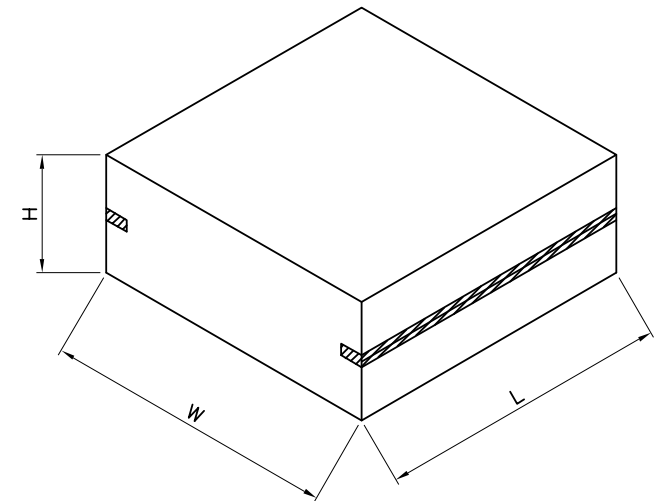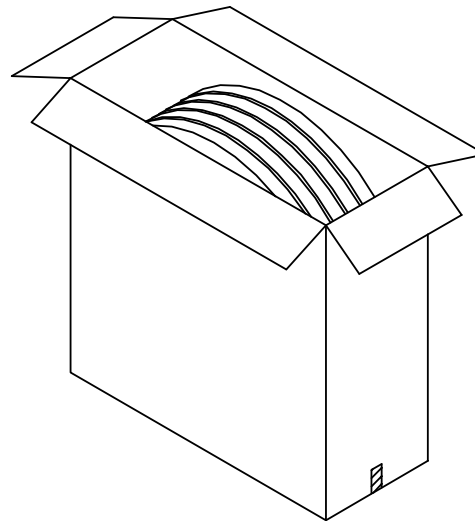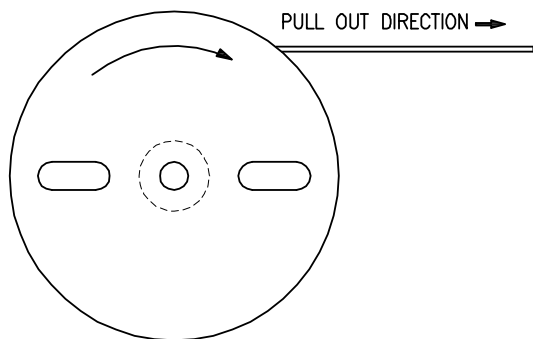

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30
.X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG $\pm 3^\circ$

PPOJECTION

照片框

ORDER INFORMATION

ILS-T-24-LF
SERIES | T LEADFREE
24~30 AWG
TERMINAL

DESCRIPTION: WIRE TO BOARD, RECEPTACLE, PITCH 2.00mm, CRIMP TYPE, CONTACT