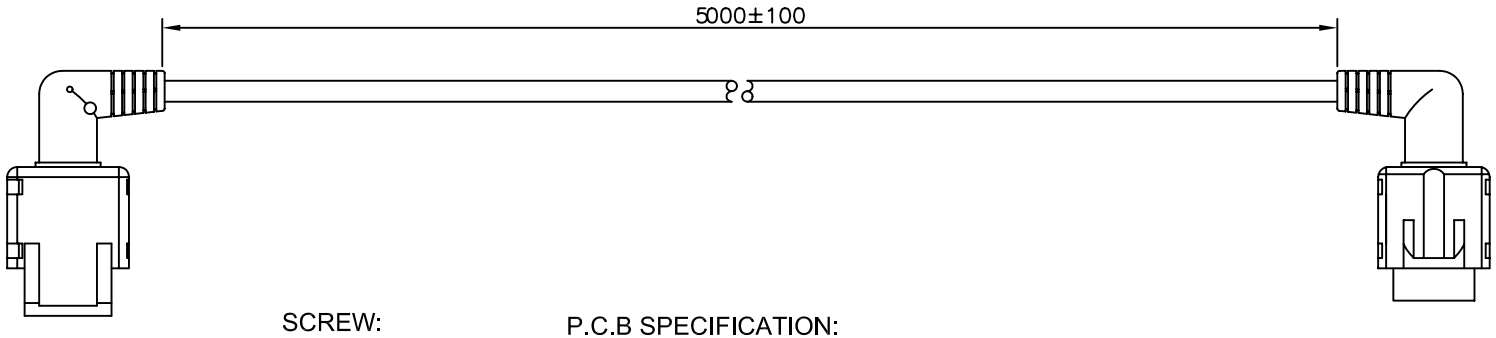

SCREW:



P.C.B SPECIFICATION:





P1



FRONT VIEW

P2



FRONT VIEW

ITEM	DESCRIPTION	Q'TY
1	2.54mm PCB SOCKET 10P	1
2	H02 FAST INSULATION	1 SET
3	2.54mm BOX HEADER 10P	1
4	H04 FAST INSULATION	1 SET
5	UL2803 28AWGX3P (7/0.127)+22AWGX3C (7/0.254)+B OD:6.5mm PVC BLACK WITHOUT POLISH	1
6	HEAT SHRINK TUBE OD:2.0 COLOR:BLACK	1
7	THICKNESS 1.1 P.C.B L*W=17.5*11	1
8	THICKNESS 1.1 P.C.B L*W=14.5*8.0	1
9	THUMB SCREW 5.3*9.65	4
10	70P PVC BLACK WITHOUT POLISH MOLDING	

PIN OUT			
P1		P2	
1	BROWN	1	TWISTED PAIR
2	BLUE	2	
3	RED	3	TWISTED PAIR
5	WHITE	5	
7	GREEN	7	TWISTED PAIR
8	PINK	8	
4	ORANGE	4	———
6	YELLOW	6	———
9	BLACK	9	———
10	BRAID	10	———

MORETHANALL CONNECTORS ASSEMBLIES

煜倫有限公司

PART NO. ILWX2-1010-E5M			TOLERANCES ARE	DESCRIP TION:	ROUND CABLE MOLDING
DWG NO. ILWX2-1010-E5M	CHECKED BY CY		.X ± 0.2 .XX ± 0.15 .XXX ± AWG		
FILE NO.	DRAWING BY			AREA	REVISIONS / HK / DATE
UNIT / mm	SCALE 1 : 1	PROJECTION			

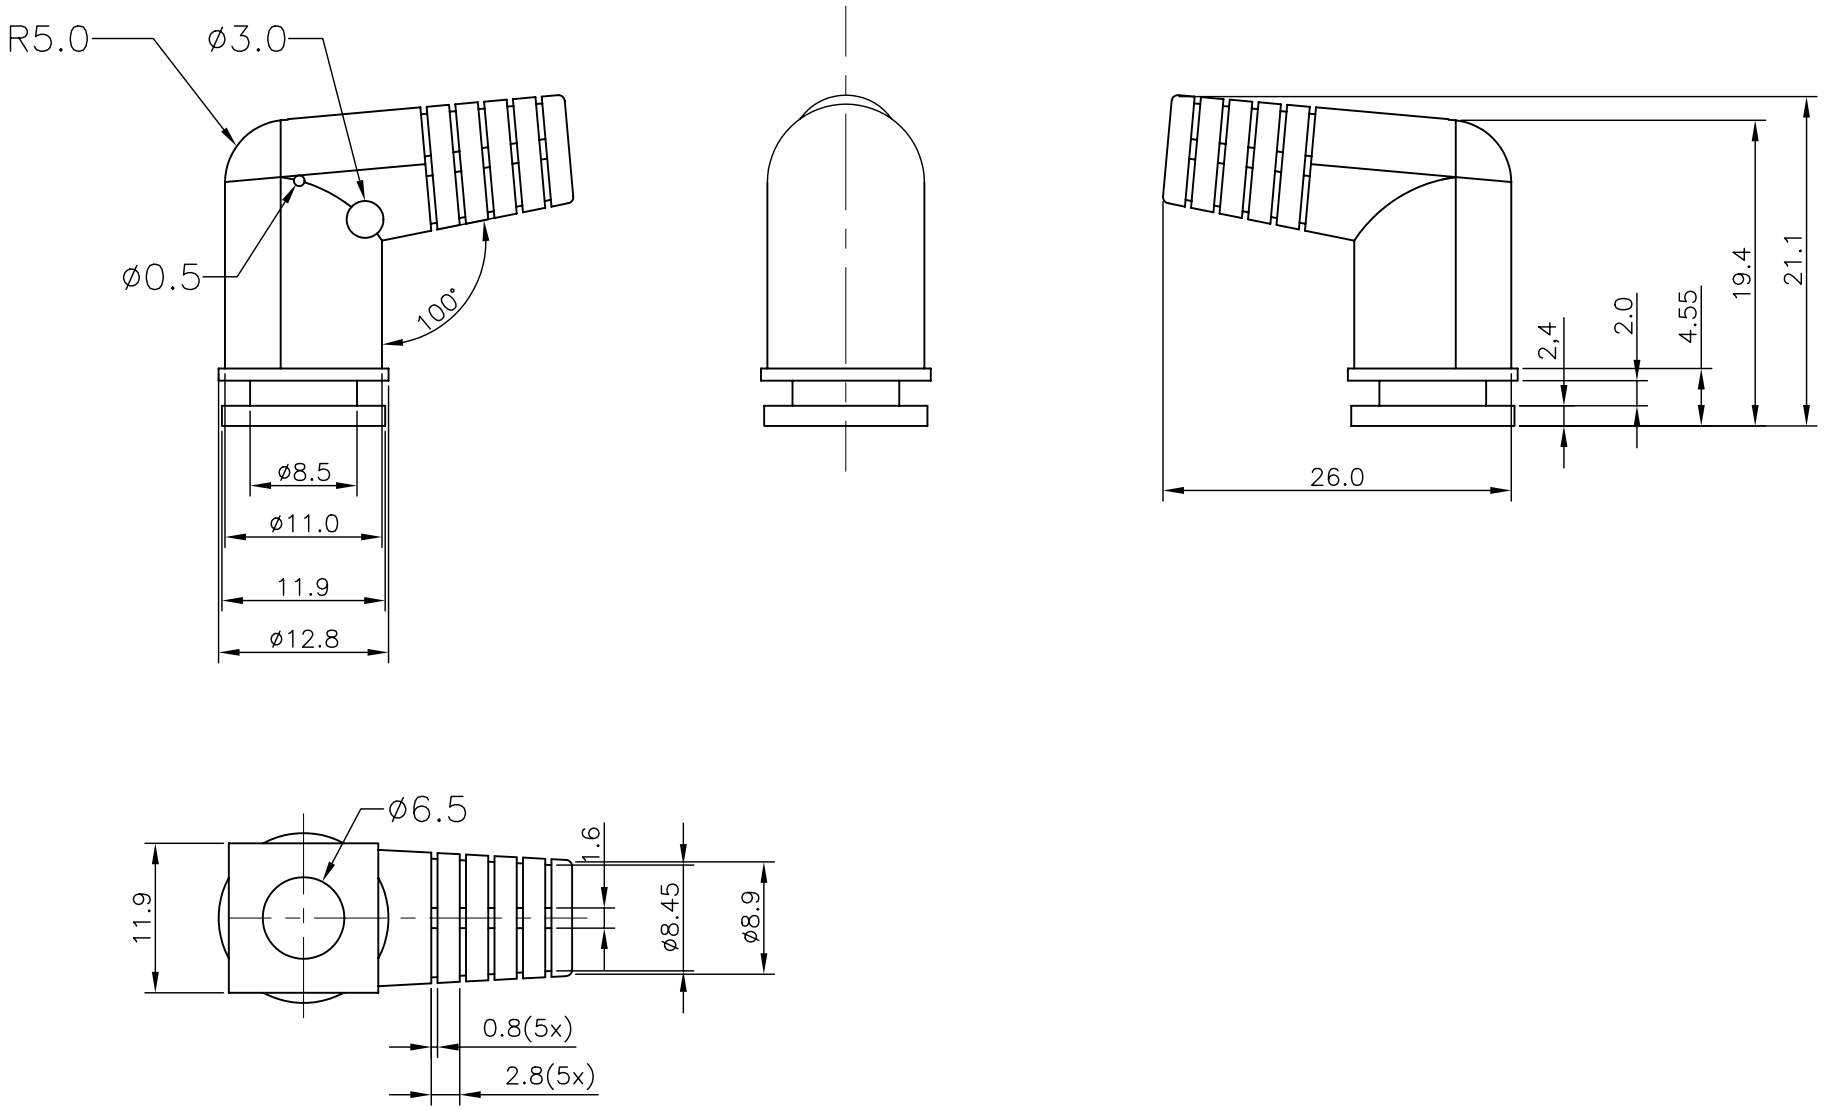

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫有限公司

PART NO. ILWX2-1010-SR			TOLERANCES ARE	DESCRIP TION:	SR MOLDING	
DWG NO. ILWX2-1010-SR	CHECKED BY CY		.X ± 0.2 .XX ± 0.15 .XXX ± AWG			
FILE NO.	DRAWING BY					
UNIT / mm	SCALE 1 : 1	PROJECTION		AREA	REVISIONS	HK / DATE