
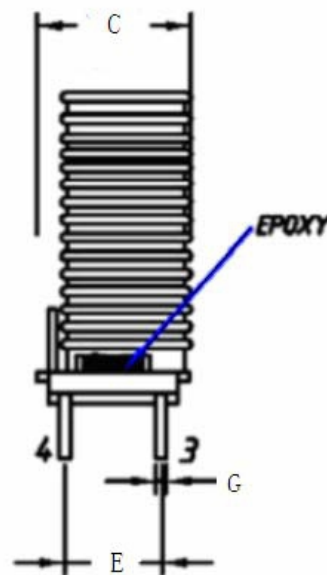


1. CONFIGURATION DIMENSIONS (UNIT:mm)

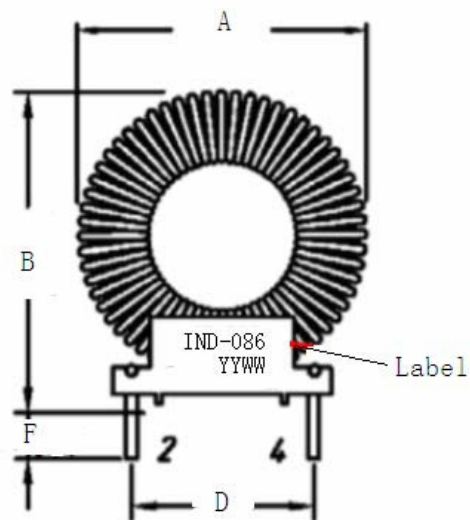

A: 30.5 MAX

B: 35.0 MAX

C: 15.0 MAX

D: 15.2 ± 0.5

E: 6.3 ± 0.5

F: 3.8 TYP

G: Φ 1.0 ± 0.1

2. ELECTRICAL CHARACTERISTICS:

George chow

(1). INDUCTANCE: AT: 1KHZ 0.25V (HP-4284A & VR113+712)

L (1-3): 85uH ± 20%


L (2-4): 85uH ± 20%

L (5A): 65uH ± 20%

(2). DC RESISTANCE: AT 25°C

DCR (1-3): 90m Ω MAX

DCR (2-4): 90m Ω MAX

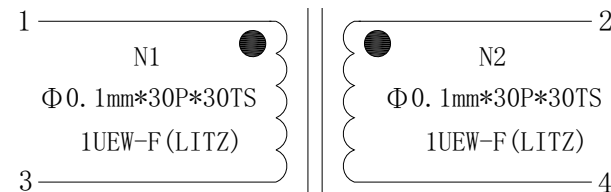

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

IND-D-0615-LF
SERIES LEADFREE
6.3X15.2mm
DIP 180°

DESCRIPTION: