



MATERIALS:
 INSULATOR:P.B.T.30%GLASS FIBER,UL94V-0
 CONTACT MATERIAL:BRASS OR PHOSPHOR
 BRONZE,GOLD FLASH OVER NICKEL

ELECTRICAL:
 CURRENT RATING:1AMP DC
 INSULATION RESISTANCE:5000MΩ MIN.
 CONTACT RESISTANCE:30mΩ MAX.
 DIELECTRIC WITHSTANDING:1000V AC
 OPERATING TEMPERATURE:-40°C~+105°C
 TERMINATED WITH 1.27mm
 PITCH FLAT RIBBON CABLE.

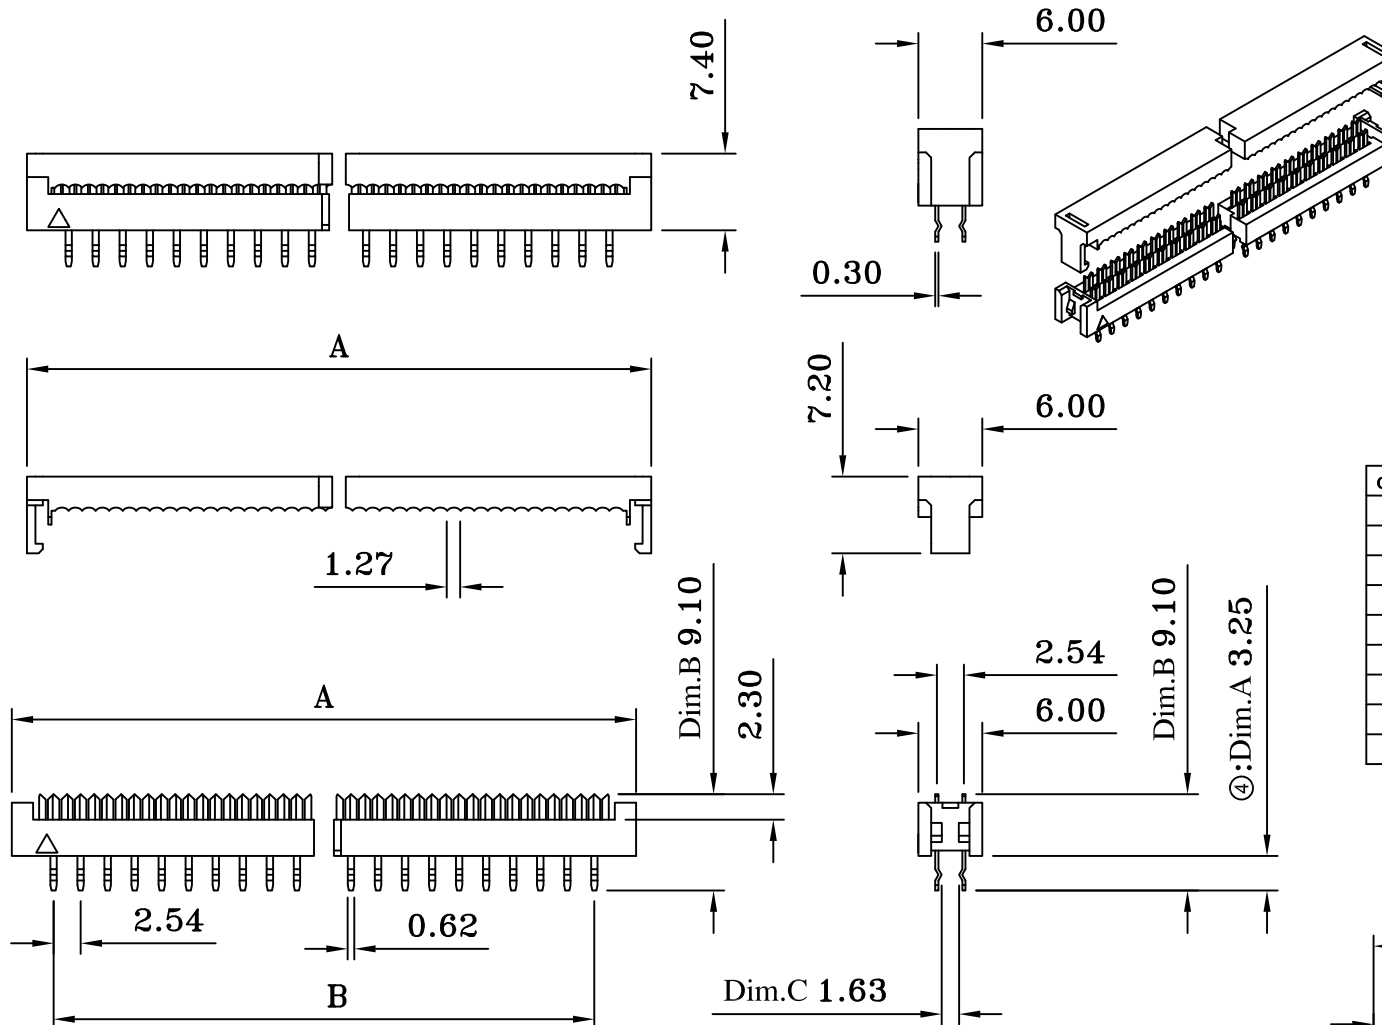

CONTACTS	A	B	CONTACTS	A	B
06P	12.94	5.08	26P	38.40	30.48
08P	15.48	07.62	28P	40.60	33.02
10P	18.10	10.16	30P	43.50	35.56
12P	20.51	12.70	34P	48.58	40.64
14P	23.05	15.24	40P	56.20	48.26
16P	25.64	17.78	50P	69.00	60.96
18P	28.15	20.32	60P	81.75	73.66
20P	30.78	22.86	64P	86.83	78.74
24P	35.86	27.94			

Recommended P.C. Board
Hole Layout

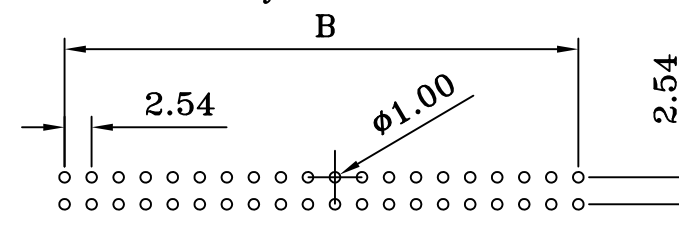

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ± 0.30

.X ± 0.20

.XX ± 0.10

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

IP01-C2K-xx-LF

SERIES

LEADFREE

06~64WAY

KINK

TWO TYPE

DESCRIPTION: