
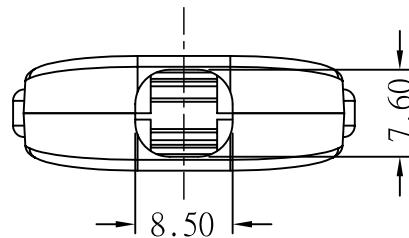
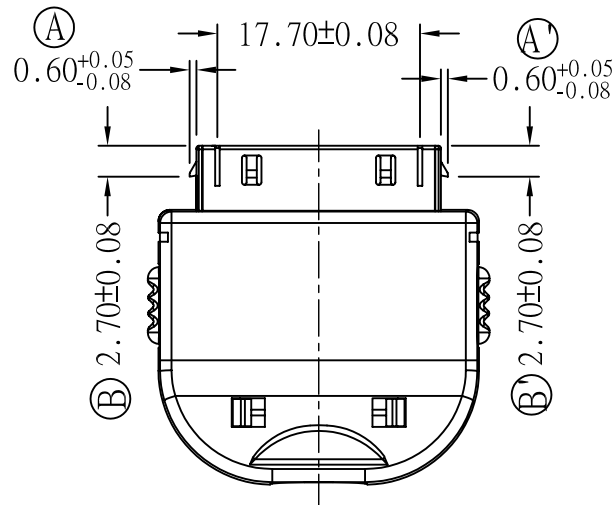
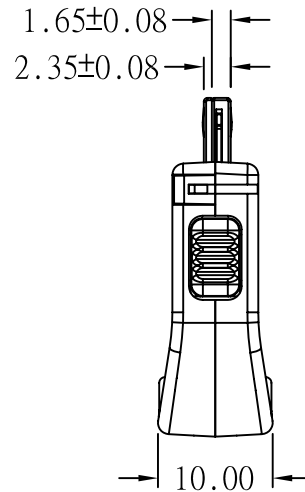


DETAIL-A SCALE 2.5:1

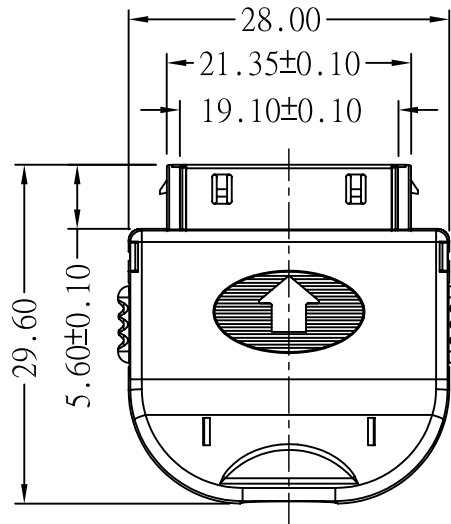

NOTE:

MATERIAL:

UPPER COVER-ABS
BOTTOM COVER-ABS
BUSH BOTTOM-ABS
HOUSING -PA66+30%纖維
BACK SHIELD-SUS301/T=0.40mm
FRONT SHIELD-SUS301/T=0.20mm
TERMINAL-JIS C5210/T=0.20mm

TERMINAL PLATING:

50~80U" Ni UNDER PLATE ALL OVER.
80~100U" Sn IN TAIL AREA.
Min 2~3U"GOLD PLATED IN CONTACT AREA

ELECTRICAL

CURRENT RATING:0.5A
DIELECTRIC WITHSTANDING VOLTAGE:300VAC
INSULATION RESISTANCE:100MΩ /1000VDC
CONTACT RESISTANCE:80mΩ

ENVIRONMENTAL

OPERATING TEMPERATURE:-10°C TO 60°C
STORAGE TEMPERATURE:-30°C TO 60°C

NO.	PAPT NO.	NAME	MATERIAL	COLOR	QTY
1	SAPD-IPD02*	I POD-30P-2 CONNECT HOUSING			1PCS
2	CAA-0839-BKA	I POD-30P-2 UPPER COVER	ABS	WHITE	1PCS
3	CAA-0840-BKA	I POD-30P-2 BOTTOM COVER	ABS	WHITE	1PCS
4	CAA-0841-BKA	I POD-30P-2 PUSH BUTTON	ABS	WHITE	2PCS
5	SEE-0242-Y*A	I POD-30P-2 FRONT SHIELD	SUS301		1PCS
6	SEE-0243-Y*A	I POD-30P-2 BACK SHIELD	SUS301		1PCS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

IPD-PSQWH-30-LF
SERIES T LEADFREE
30 WAY
WHITE
Q TYPE COVER
SOLDER
PLUG

DESCRIPTION: