

MATERIAL

Insulator : PBT+30% Glass fiber UL94-V0

SPECIFICATION

Current Rate : 1 AMP


Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Dielectric Voltage : 500V AC for one minute

Operation Temperature : -55°C to +105°C

塑膠耐溫溫度: 200°C+0/-5°C 3~5s

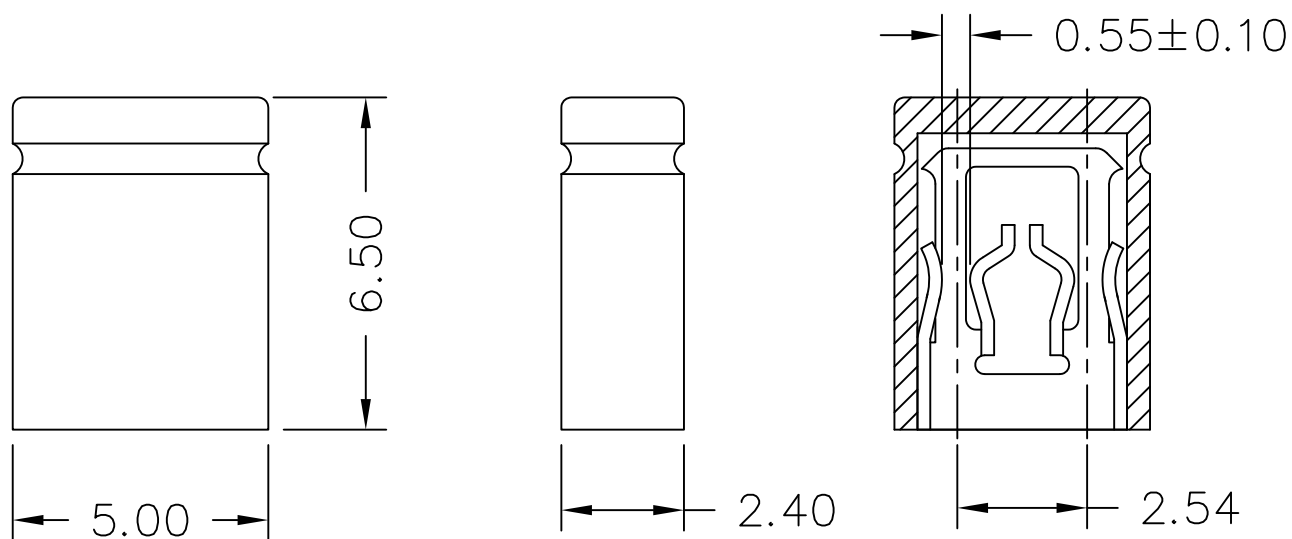

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$ 3°

PPOJECTION

照片框

ORDER INFORMATION

J-AYLS15-06-LF
SERIES | | | LEADFREE
HIGH 6.5mm
SELECTIVE GOLD 15u"
YELLOW
CLOSE

DESCRIPTION: MINI JUMPER 2.54mm