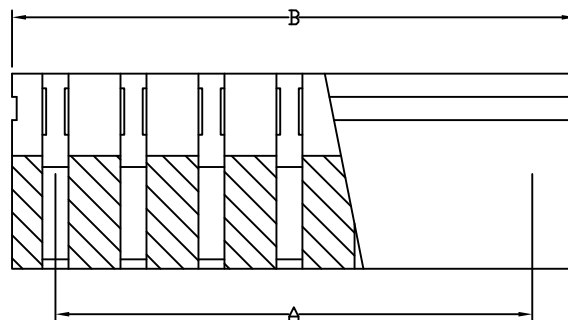

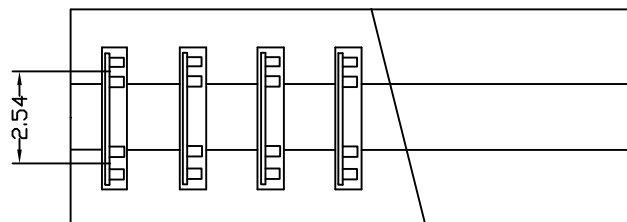


MATERIAL

Insulator : 30% Glass Filled PBT(UL 94V-0)
Contact Pin : brass C2680

SPECIFICATION

Current Rating: 3 amperes MAX
Contact Resistance: 30mΩ MAX
Insulation Resistance: 1000 megohms Min
Dielectric Withstanding Voltage: AC 650 volts
RMS at sea level

FEATURES

Double tuning fork type contact
guarantees high reliability.
2.54MM pitch Low-Profile mini type Match
to 0.64mm sq. posts.

*以下圖示塑膠公差皆為±0.30
金屬件公差為±0.05

CIRCUIT	DIM "A"	DIM "B"
2	2.54 (0.100)	5.08 (0.200)
3	5.08 (0.200)	7.62 (0.300)
4	7.62 (0.300)	10.16 (0.400)
5	10.16 (0.400)	12.70 (0.500)
6	12.70 (0.500)	15.24 (0.600)
7	15.24 (0.600)	17.78 (0.700)
8	17.78 (0.700)	20.32 (0.800)
9	20.32 (0.800)	22.86 (0.900)
10	22.86 (0.900)	25.40 (1.000)
	30.48 (1.200)	33.02 (1.300)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

J-BS-2Xxx-LF
SERIES
LEADFREE
2X02 WAY
2X10 WAY
OPEN STRIP

DESCRIPTION: MINI JUMPER 2.54mm OPEN 6.0mm