



MATERIAL

Contact Pin : Phosphor Bronze




SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Dielectric Voltage : 500V AC for one minute

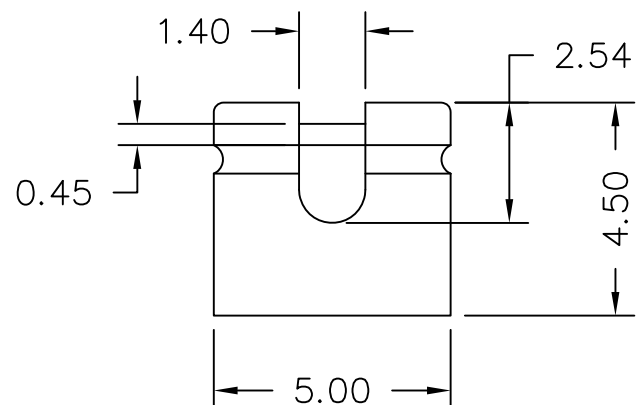

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, $\pm$

CHECKED BY GENIUS

.X $\pm$ 0.30

UNIT / mm

SCALE 1 : 1

.XX $\pm$ 0.20

DATE

.XXX $\pm$

ANG $\pm$ 3°

SIZE A4

PPOJECTION

ORDER INFORMATION

J-Bxx-04-LF
SERIES RD:RED YL:YELLOW GR:GREEN BL:BLUE WH:WHITE
OPEN LEADFREE HIGH 4.5mm

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: MINI JUMPER 2.54mm OPEN 4.5mm