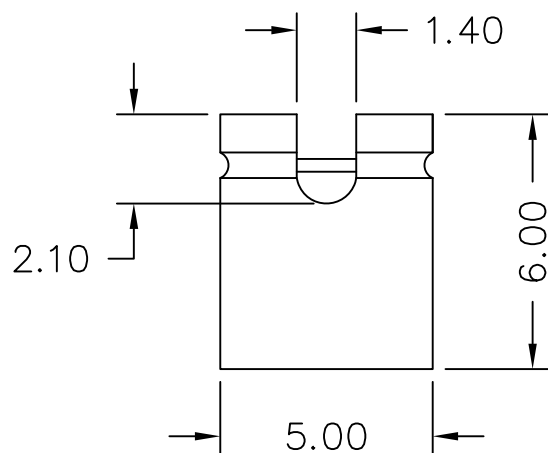


MATERIAL

Insulator : PBT+30% Glass fiber

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP $\triangle B$

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Dielectric Voltage : 500V AC for one minute

Operation Temperature : -55°C to +105°C

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

J-Bxx-06-LF
 SERIES RD:RED GE:GRAY LEADFREE
 OPEN GR:GREEN HIGH 4.5mm
 BL:BLUE
 WH:WHITE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

DESCRIPTION: MINI JUMPER 2.54mm OPEN 6.0mm