
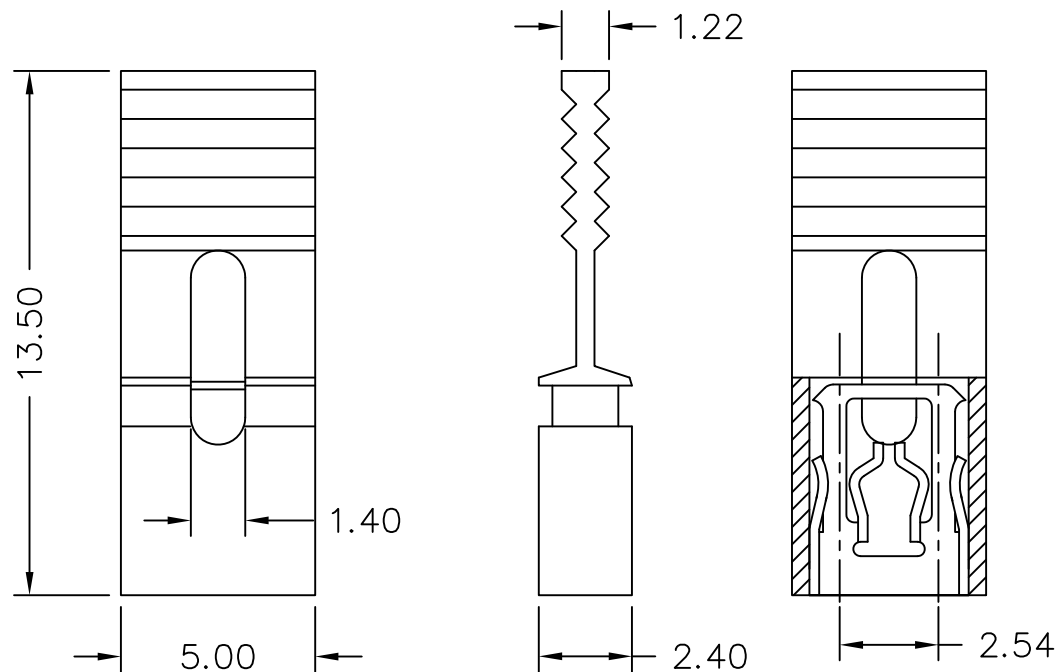




MATERIAL

Insulator : NY66

SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : 500V AC for one minute

Operation Temperature : -55°C to +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

J-HYLS15-06-LF
SERIES
LEADFREE
HIGH 6.5mm
SELECTIVE GOLD 15u"
YELLOW
HANDLE

DESCRIPTION: MINI JUMPER 2.54mm