

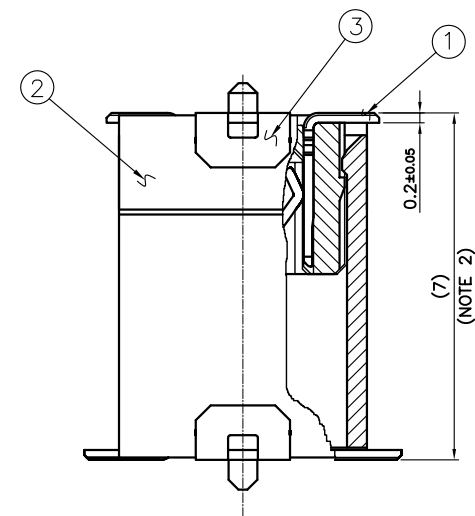
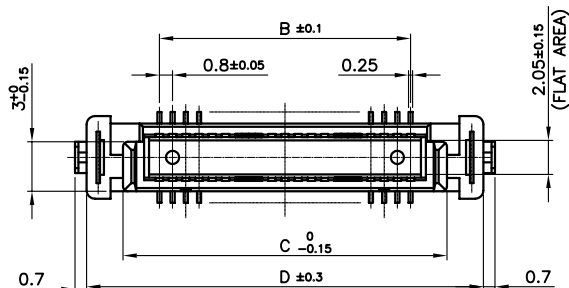



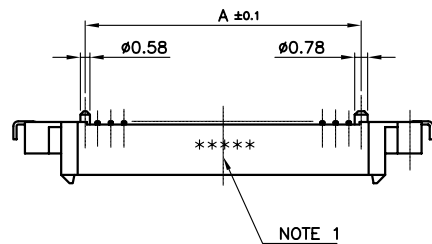

MATED CONDITION (REF.)
(SCALE 9:1)

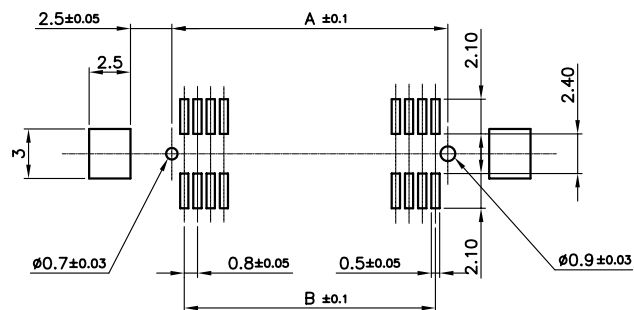

PCB. PATTERN (REF.)

NO.	A	B	C	D
20	8.7	7.2	11.6	16
30	12.7	11.2	15.6	20
40	16.7	15.2	19.6	24
50	20.7	19.2	23.6	28
60	24.7	33.2	27.6	32

3	HOLD DOWN	2	COPPER ALLOY	Au OVER NICKEL	
2	INSULATOR	1	PPS+GF		BLACK
1	CONTACT	TABLE2	COPPER ALLOY	Au OVER NICKEL	
NO.	Description	Quantity	Material	Finish	Remark

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

JKX-P20R-xxx-LF

SERIES LEADFREE

020:20 WAY



060:60 WAY

MALE

REEL

UNMATED HIGH 1.95mm

DESCRIPTION:



No. of conducts	A	B	C	D	E	F
20	14.2	28.4	32	16.32	37.5	32.5
30	20.2	40.4	44	20.32	49.5	44.5
40	20.2	40.4	44	24.32	49.5	44.5
50	20.2	40.4	44	28.32	49.5	44.5
60	26.2	52.4	56	32.32	61.5	56.5

4	REEL	1	—	—	
3	COVER—TAPE	—	PET	—	
2	CARRIER—TAPE	—	PS	—	
1	CONNECTOR	1000	—	—	7636103U5430Z
NO.	Description	Quantity	Material	Finish	Remark

