
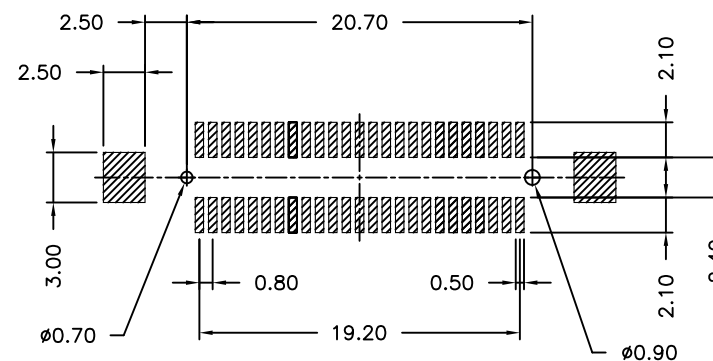

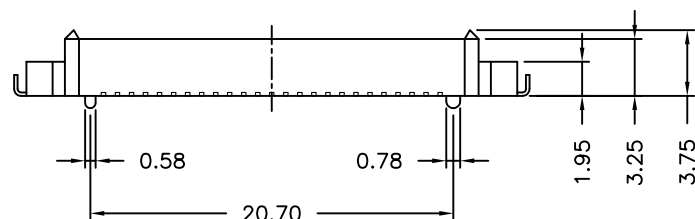


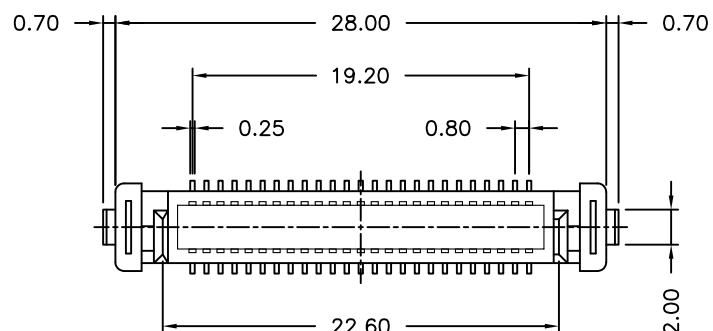

P.C.B. Layout(TOP VIEW)

Material

Insulator : High Temperature Thermoplastic
UL 94V-0 Glass Filled

Contact : Phosphor Bronze

Contact Plated : Gold Over Nickel

Specification

Insulator Resistance : 100M Ω Min.

Contact Resistance : 70m Ω Max.

Temperature : -40°C ~ +85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION


X, $\pm$

.X, $\pm$

.XX, $\pm$

.XXX, $\pm$

ANG, $\pm$



ORDER INFORMATION

JKX-P21-050-LF
SERIES | LEADFREE
50 WAY
UNMATED HIGH 2.1mm
MALE

DESCRIPTION: 0.80 mm Pitch B To B Female 50 Pin