
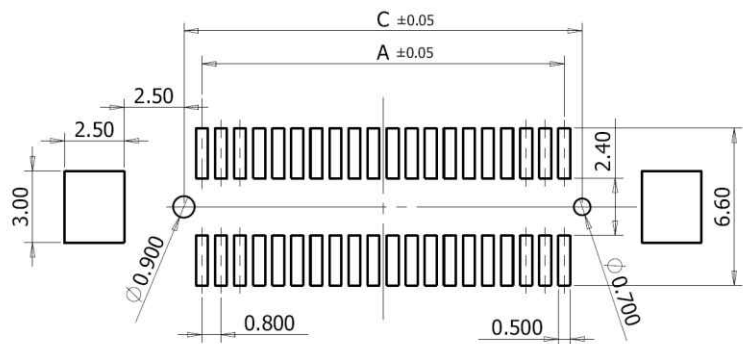



Mated condition (REF.)

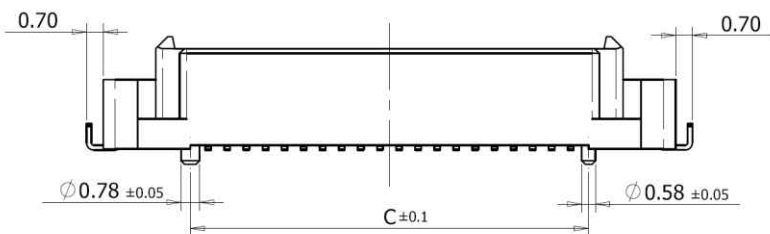

P.C.B. Layout (Ref.)

Pos.	Part No.	A	B	C	Note
30	JKX-P29A-030	11.2	20	12.7	
40	JKX-P29A-040	15.2	24	16.7	
50	JKX-P29A-050	19.2	28	20.7	
60	JKX-P29A-060	23.2	32	24.7	

3	Hold down	2	Copper alloy	Tin over Ni	
2	Terminal	Table-1	Copper alloy	Au over Ni	
1	Insulator	1	LCP+GF	Black	UL 94V-0
No.	Description	Quantity	Material	Finish	Note

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

JKX-P29A-xxx-LF
SERIES | | LEADFREE
030~060WAY
POST+EAR
UNMATED HIGH 2.95mm
MALE

DESCRIPTION: