

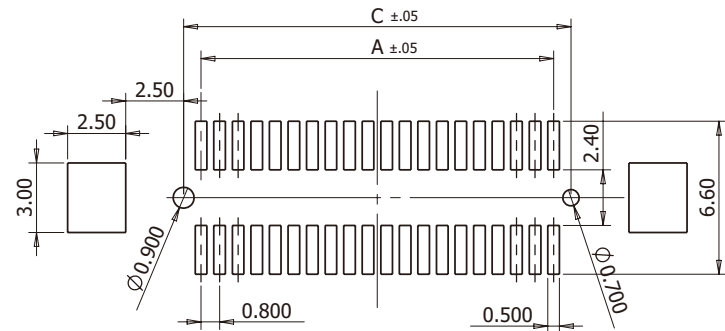
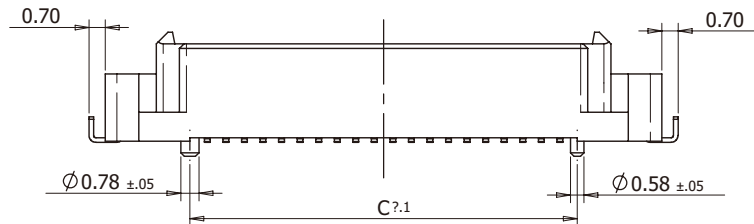
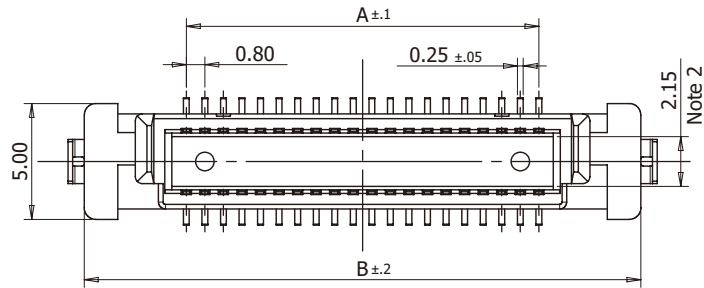





P.C.B. Layout (Ref.)

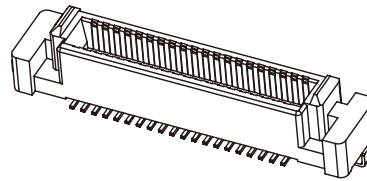

Mated condition (REF.)

Note:

1. Mated condition of JKX series Socket & Plug,
This stack height were be located with JKX SVX.
2. Vacuum pick up area.

Table-1					
Pos.	Part number	A	B	C	Note
30	JKX-P30R-030	11.2	20	12.7	
40	JKX-P30R-040	15.2	24	16.7	
50	JKX-P30R-050	19.2	28	20.7	
60	JKX-P30R-060	23.2	32	24.7	

3	Hold down	2	Copper alloy	Tin over Ni	
2	Terminal	Table-1	Copper alloy	Au over Ni	
1	Insulator	1	PA9T+GF	Black	UL 94V-0
No.	Description	Quantity	Material	Finish	Note

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

JKX-P30R-xxx-LF

SERIES LEADFREE

030:30 WAY




060:60 WAY

MALE


REEL

UNMATED HIGH 2.95mm


DESCRIPTION: Board to Board Conn. 0.8mm pitch height 3mm, Plug

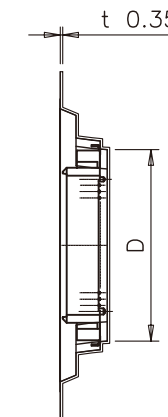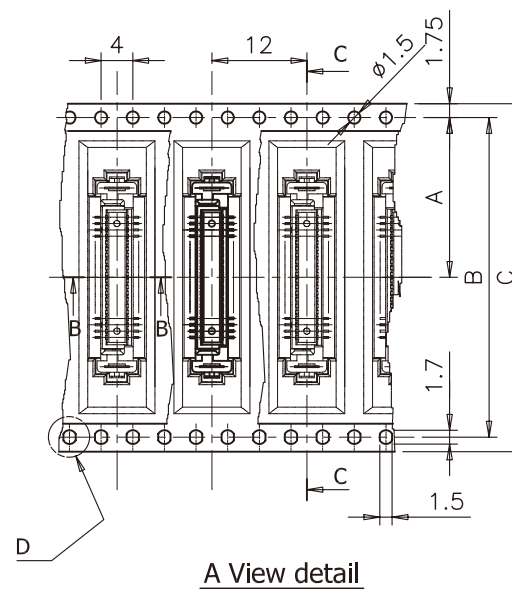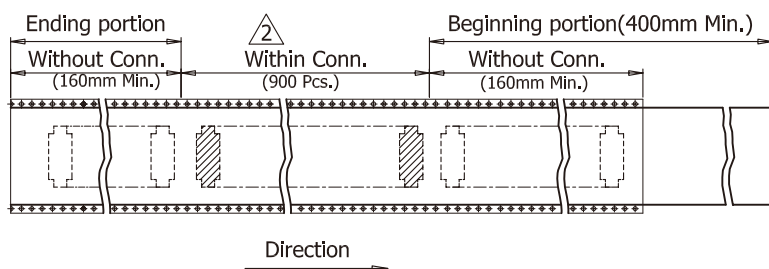

C-C Section



D View detail

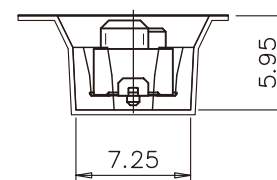

B-B Section

Table 2

Pos.	A	B	C	D	E
30	20.2	40.4	44	20.32	49.6
40	20.2	40.4	44	24.32	49.6
50	20.2	40.4	44	28.32	49.6
60	26.2	52.4	56	32.32	61.6

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE _____

SIZE A4

PPOJECTION

X.	±
.X	±
.XX	±
.XXX	±
ANG	±

照片框

ORDER INFORMATION

JKX-P30R-xxx-LF

SERIES LEADFREE

030:30 WAY

060:60 WAY

MALE

REEL

UNMATED HIGH 2.95mm

DESCRIPTION: Board to Board Conn. 0.8mm pitch height 3mm, Plug