

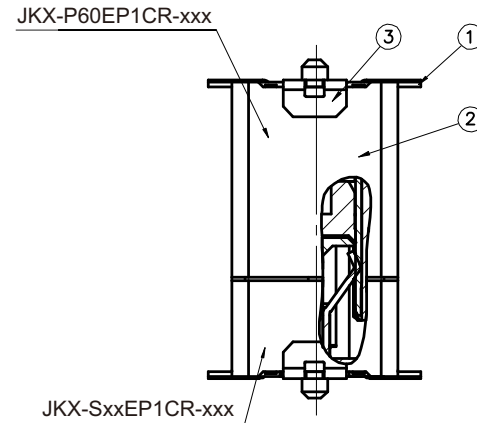

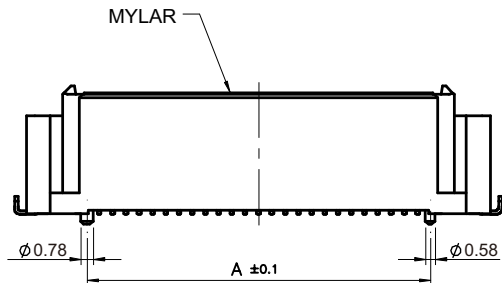


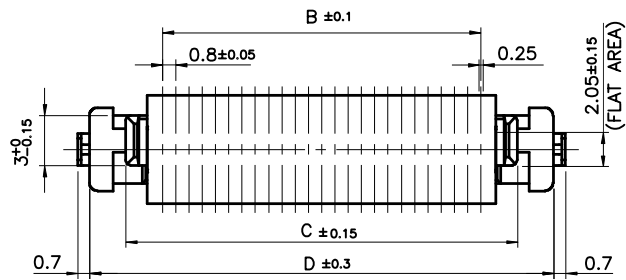

MATED CONDITION (REF.)
(SCALE 6:1)

- NOTE:1. PRODUCTION LOT NUMBER
2. MATED CONDITION OF SOCKET & PLUG THIS STACK HEIGHT WERE BE LOCATED WITH
3. COPLANARITY OF SMT TERMINAL IS 0.1mm MAX.

NO.	Part No.	A	B	C	D
20	JKX-P60EP1CR-020	8.7	7.2	11.6	16
30	JKX-P60EP1CR-030	12.7	11.2	15.6	20
40	JKX-P60EP1CR-040	16.7	15.2	19.6	24
50	JKX-P60EP1CR-050	20.7	19.2	23.6	28
60	JKX-P60EP1CR-060	24.7	23.2	27.6	32

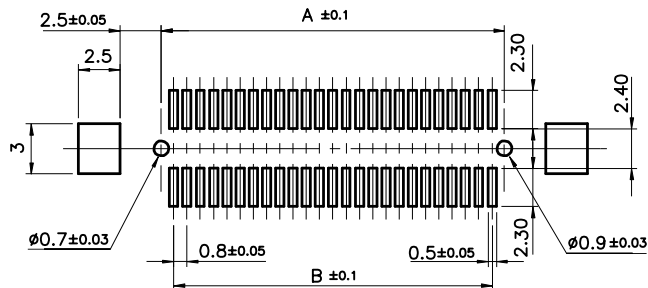

PCB. PATTERN (REF.)

4	MYLAR	1	-----	-----	
3	HOLD DOWN	2	COPPER ALLOY	Sn Over Nicket	
2	INSULATOR	1	HIGH TEMP.THERMOPLASTIC	-----	BLACK
1	CONTACT	TABLE 1	COPPER ALLOY	Au Over Nicket	
NO.	Description	Quantity	Material	Finish	Remark

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

JKX-P60EP1C-xxx-LF
SERIES | LEADFREE
020:20 WAY
060:60 WAY
MALE | MYLAR
EAR+POST
UNMATED HIGH 6.0mm

DESCRIPTION: