

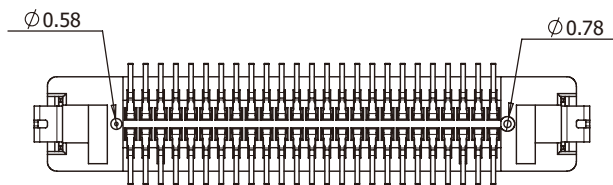
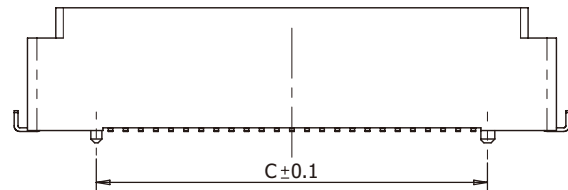
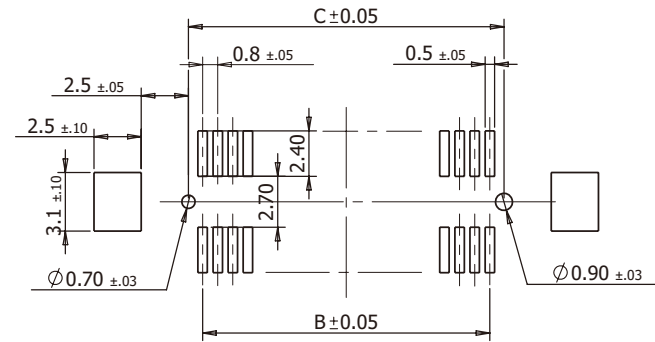


Note 2

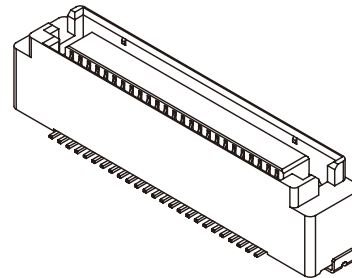


Note :

1. Coplanarity of SMT terminal is 0.1mm maximum.
2. Vacuum pick up area.



P.C.B Pattern (REF.)  
component side



Contact area detail

| Table 1 |              |       |       |       |      |
|---------|--------------|-------|-------|-------|------|
| Pos.    | Part number  | A     | B     | C     | Note |
| 30      | JKX-S50R-030 | 20.00 | 11.20 | 12.70 |      |
| 40      | JKX-S50R-040 | 24.00 | 15.20 | 16.70 |      |
| 50      | JKX-S50R-050 | 28.00 | 19.20 | 20.70 |      |
| 60      | JKX-S50R-060 | 32.00 | 23.20 | 24.70 |      |

| 3   | Hold down   | 2        | Copper Alloy | Tin over Ni |          |
|-----|-------------|----------|--------------|-------------|----------|
| 2   | Insulator   | 1        | LCP+GF       | Black       | UL 94V-0 |
| 1   | Terminal    | Table 1  | Copper Alloy | Au over Ni  |          |
| No. | Description | Quantity | Material     | Finish      | Note     |

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

照片框

**ORDER INFORMATION**

JKX-S50R-xxx-LF

SERIES

MALE

REEL

UNMATED HIGH 4.95mm

LEADFREE

030:30 WAY

060:60 WAY

UNMATED HIGH 4.95mm

DESCRIPTION: Board to Board , 0.8mm pitch Straight , Height 5 mm Socket

