

Specifications




Electrical:

Insulator Resistance: 100M Ω Min.

Contact Resistance: 70m Ω Max.

Environmental:

Operation Temperature: -40°C~+85°C

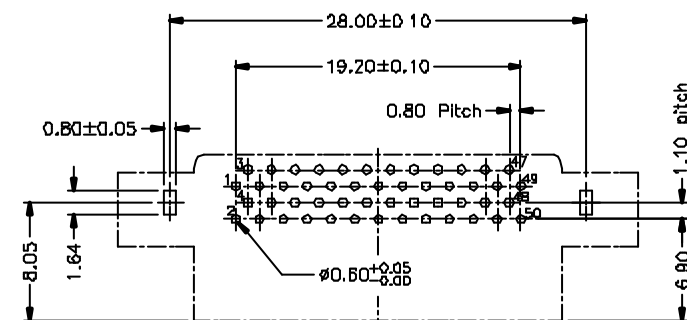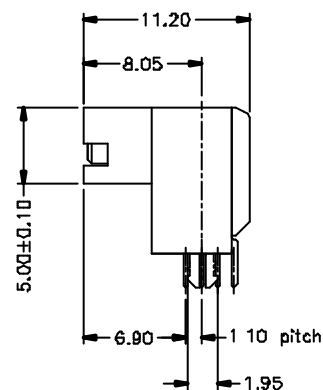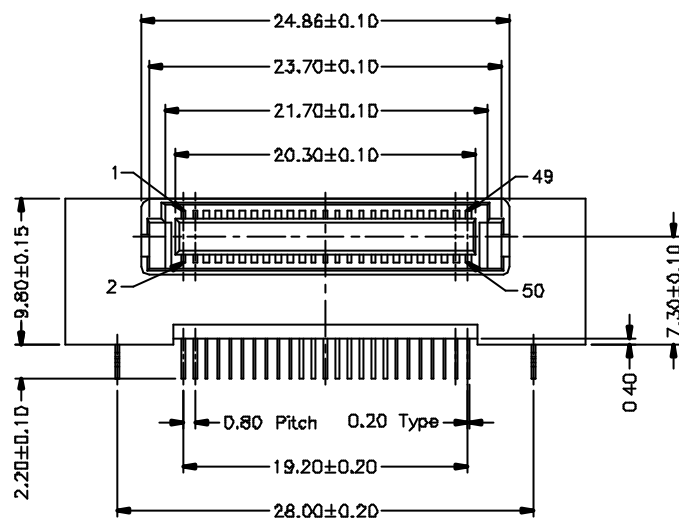

Recommended PCB Layout (Top View)

Thickness=1.20~1.60

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

JKX-SR98Z-050-LF

SERIES | | LEADFREE
| | 050WAY
| | CLIP
| | HIGH 9.80mm
| | DIP 90°
| | FEMALE

DESCRIPTION: 0.8mm Board to Board R/A 50 Pin DIP TYPE