

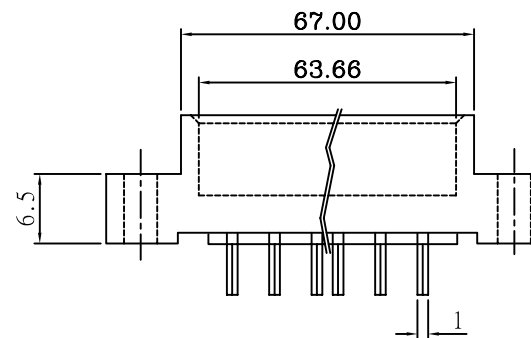


- * Housing Material:
UL94V-0 Glass fiber
reinforce polyester
- * Contact Material:
Phosphor bronze or Brass
- * Current Rating:
3 Amp (1600VAC)
- * Contact Resistance:
Less than 10 milliohms
- * Insulation Resistance:
Over 1000 Ω 500VDC/1 min
- * Operation Temperature:
-55°C ~ +120°C
- * Operation Relative:
Humidity : 5 to 95% R.H.

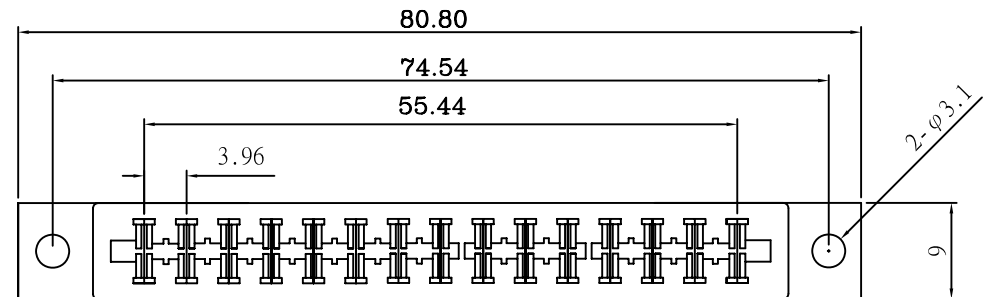

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

ORDER INFORMATION

KE-DLE-1X15K47-LF
SERIES
15 WAY
LOW EAR
DIP 180°
LEADFREE
KEYPLUG 4/PAIR 7/PAIR

DESCRIPTION: 3.96 SOLT