




- * Housing Material:
UL94V-0 Glass fiber
reinforce polyester
- * Contact Matreial:
Phospher bronze or Brass
- * Current Rating:
3 Amp (1600VAC)
- * Contact Resistance:
Less than 10 milliohms
- * Insulation Resistance:
Over 1000Ω 500VDC/1 min
- * Operation Temperature:
-55°C ~ +120°C
- * Operation Relative:
Humidity : 5 to 95% R.H.

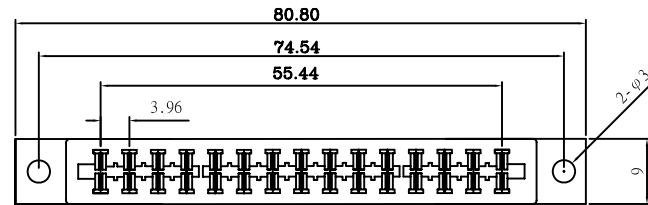


KE-DLE-30K411

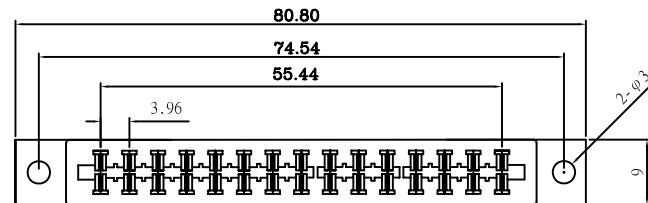



KE-DLE-30K811

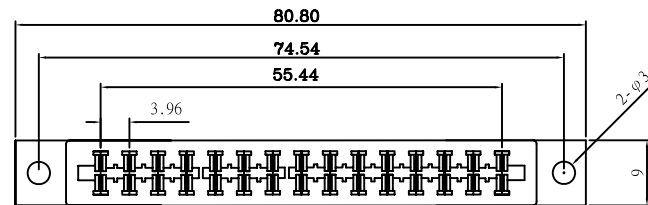

KE-DLE-30K47

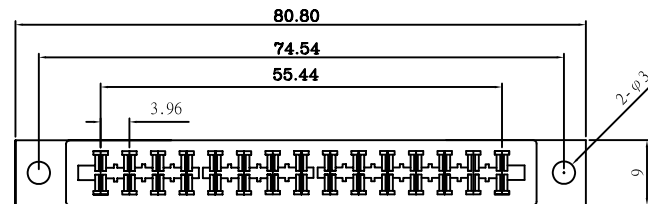

KE-DLE-30K48

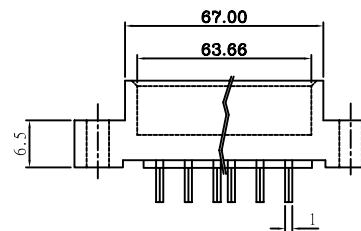

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

ORDER INFORMATION

KE-DLE-30Kxxx-LF
SERIES
DIP 180°
LEADFREE
K411:KEYPLUG 4/PAIR 11/PAIR
K48:KEYPLUG 4/PAIR 8/PAIR
30 WAY
LOW EAR

DESCRIPTION: 3.96 SOLT