

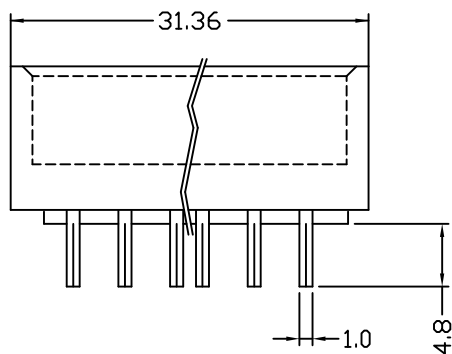


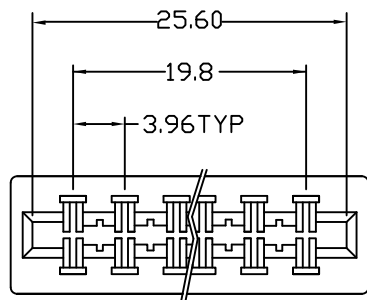

DIP TYPE



■ MATERIAL

INSULATOR: PBT +30% GLASS FIBER (UL94V-0).

CONTACT: PHOSPHOR BRONZE OR BRASS.

PLATING: GOLD OVER NICKEL.

■ SPECIFICATION

CURRENT RATING: 3 AMP.

INSULATION RESISTANCE: 5000 MEGOHMS MIN AT 500 VDC.

CONTACT RESISTANCE: 20 MILLIOHMS MAX.

VOLTAGE : 500V FOR ONE MINUTE.

■ ENVIRONMENTAL

TEMPERATURE RANGE: -40°C TO +105°C.

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

ORDER INFORMATION

KE-DXE-12EA-LF
SERIES | LEADFREE
| EMPTY A ROW
| 12 WAY
| NON EARS
| DIP 180°

DESCRIPTION: 3.96 PITCH WITH OUT MOUNTING EAR