
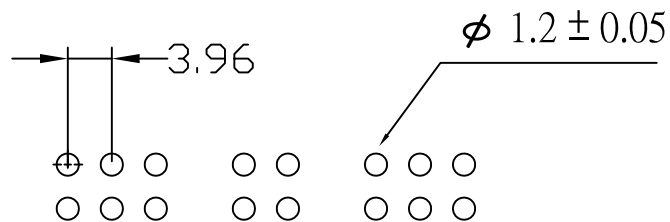


DIP TYPE



- MATERIAL**  
 INSULATOR: PBT +30% GLASS FIBER (UL94V-0).  
 CONTACT: PHOSPHOR BRONZE OR BRASS.  
 PLATING: GOLD OVER NICKEL.
- SPECIFICATION**  
 CURRENT RATING: 3 AMP.  
 INSULATION RESISTANCE: 5000 MEGOHMS MIN AT 500 VDC.  
 CONTACT RESISTANCE: 20 MILLIOHMS MAX.  
 VOLTAGE : 500V FOR ONE MINUTE.
- ENVIRONMENTAL**  
 TEMPERATURE RANGE: -40°C TO +85°C.

照片框

RoHS Compliant

TOLERANCES ARE

0-10 ±0.2  
 30-100 ±0.4  
 OVER 300 ±0.6

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1 : 1  
 DATE  
 SIZE A4 PROJECTION

ORDER INFORMATION

KE-DXED30-20E47-LF  
 SERIES | LEADFREE  
 20 WAY EMPTY #4#7  
 DIP 3.0mm  
 NON EAR  
 DIP 180°

DESCRIPTION: 3.96 PITCH WITH OUT MOUNTING EAR

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com