
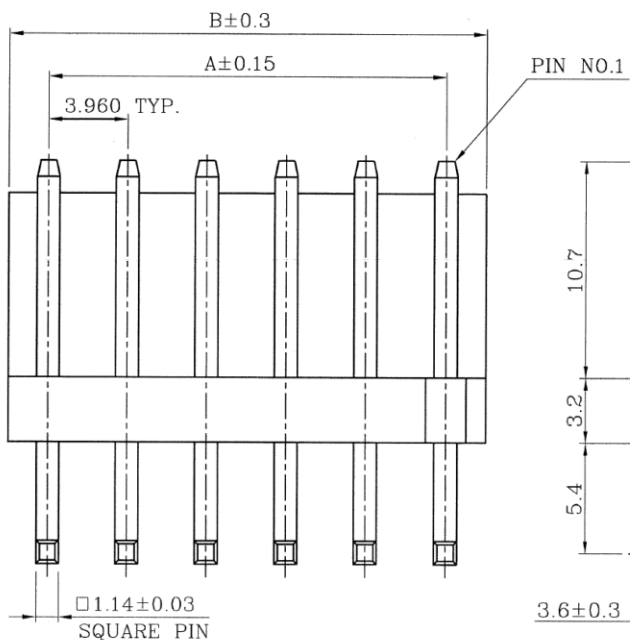
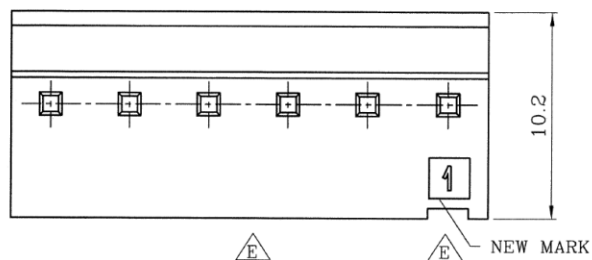


P. C. BOARD LAYOUT

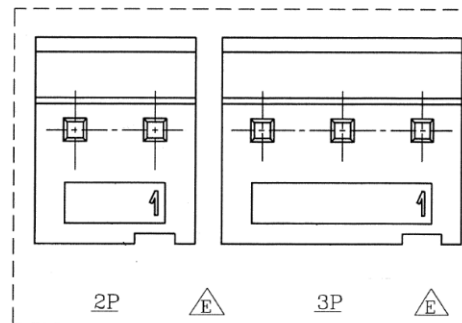

## NOTES:

### 1. MATERIAL:

BASE: NYLON 66 94V-0/94V-2 (NATURAL)

PIN : BRASS TIN-PLATED

### DIMENSIONS:

| CIRCUITS | DIM. A | DIM. B |
|----------|--------|--------|
| 2        | 3.96   | 7.92   |
| 3        | 7.92   | 11.88  |
| 4        | 11.88  | 15.84  |
| 5        | 15.84  | 19.80  |
| 6        | 19.80  | 23.76  |
| 7        | 23.76  | 27.72  |
| 8        | 27.72  | 31.68  |
| 9        | 31.68  | 35.64  |
| 10       | 35.64  | 39.60  |
| 11       | 39.60  | 43.56  |
| 12       | 43.56  | 47.52  |
| 13       | 47.52  | 51.48  |
| 14       | 51.48  | 55.44  |
| 15       | 55.44  | 59.40  |

TABLE-1

| VOID TYPE | DESCRIPTION                     |
|-----------|---------------------------------|
| N02       | NO.2 CIRCUIT VOID               |
| NXX       | NO.XX CIRCUIT VOID              |
| NB1       | NO.1 & 3 CIRCUITS VOID          |
| NB2       | NO.2 & 4 CIRCUITS VOID          |
| NB8       | NO.8 & 10 CIRCUITS VOID         |
| NC2       | NO.2, 4, 6 CIRCUITS VOID        |
| ND2       | NO.2, 4, 6, 8 CIRCUITS VOID     |
| NE2       | NO.2, 4, 6, 8, 10 CIRCUITS VOID |
| N2A       | NO.2 & 3 CIRCUITS VOID          |
| N2B       | NO.3 & 4 CIRCUITS VOID          |
| N3A       | NO.2, 3, 4 CIRCUITS VOID        |
| N3B       | NO.3, 4, 5 CIRCUITS VOID        |
| N4A       | NO.2, 3, 4, 5 CIRCUITS VOID     |

## RoHS Compliant

### TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.12

.XXX ± 0.08

ANG ± 3°

PPOJECTION

照片框

## ORDER INFORMATION

KK-R-xx-LF  
SERIES | LEADFREE  
02~15WAY  
DIP 90°

DESCRIPTION:

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com