
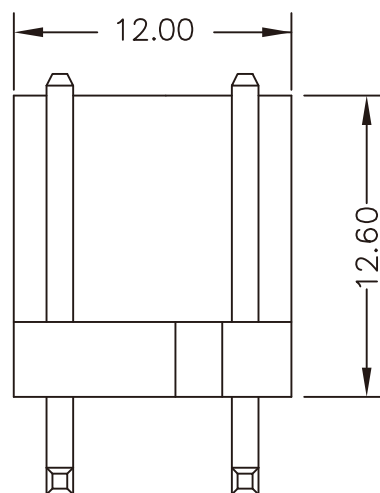
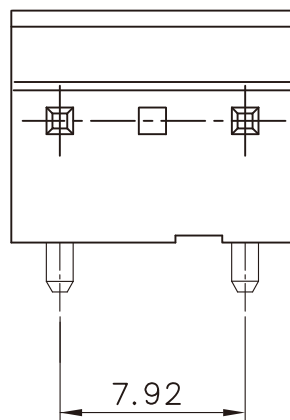


RECOMMENDED P.C.BOARD HOLE DIMM.

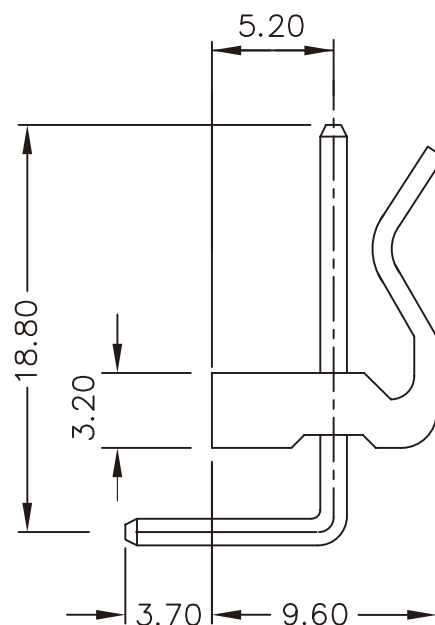

註

2P-10P公差值為 $\pm 0.3\text{mm}$

SPECIFICATIONS

Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Insulation Resistance: $1000\text{M}\Omega / \text{min.}$

Dielectric Withstanding Voltage: 1500V AC/ min.

Contact Resistance: $10\text{m}\Omega / \text{max.}$

Material

Material: Nylon66, UL94V-2

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

ORDER INFORMATION

KK-REE-02-LF
SERIES | LEADFREE
02 WAY
EMPTY EVEN PIN
DIP 90°

DESCRIPTION: 3.96mm Wire-to-Board Header Dip 90° Type