
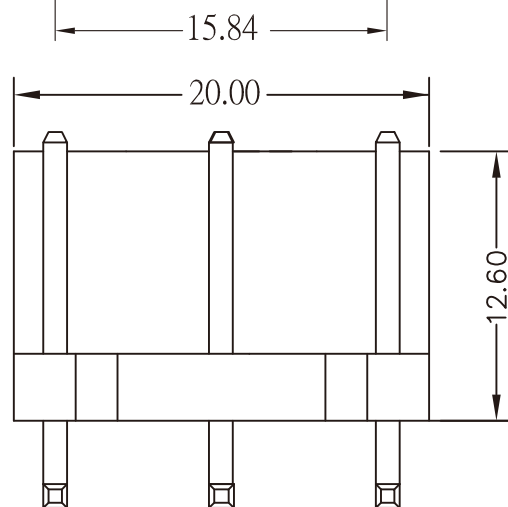
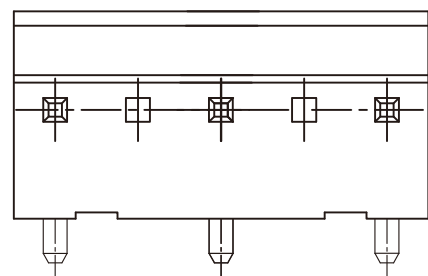


RECOMMENDED P.C.BOARD HOLE DIMM.

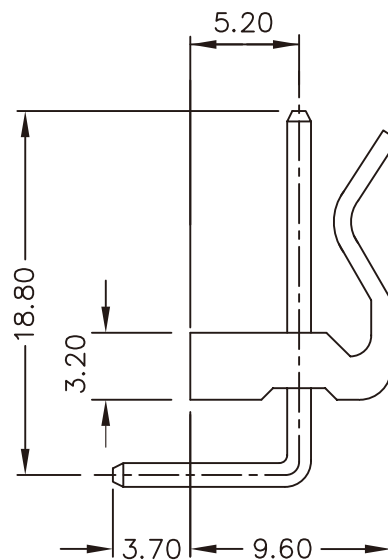

SPECIFICATIONS

Electrical

Current Rating: 5A AC, DC

Voltage Rating: 250V AC, DC

Operating Temp.: -25°C ~ +85°C

Insulation Resistance: 1000MΩ / min.

Dielectric Withstanding Voltage: 1500V AC / min.

Contact Resistance: 10mΩ / max.

Material

Material: Nylon66, UL94V-2

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PROJECTION

照片框

ORDER INFORMATION

KK-REE-03-LF
SERIES | LEADFREE
03 WAY
EMPTY EVEN PIN
DIP 90°

DESCRIPTION: 3.96mm Wire-to-Board Header Dip 90° Type