

SPECIFICATIONS

Current Rating:

7 Amp

Voltage:

230V

Insulator resistance:

5000 Megohms Min.

Contact Resistance:

20 m ohms Max.

Dielectric withstanding:

AC 500V/minute

Operating Temperature:

-25° ~ +105°C

Contact Material:

Brass


Insulator Material:

Nylon-46 UL94V-0



Color: Natural

Finish:


Tin plated

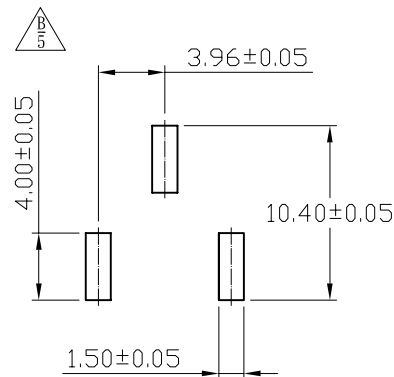

RECOMMENDED P. C. B. LAYOUT

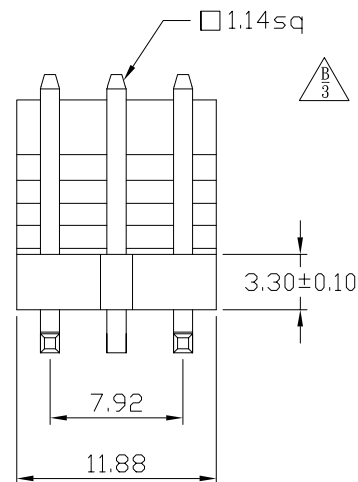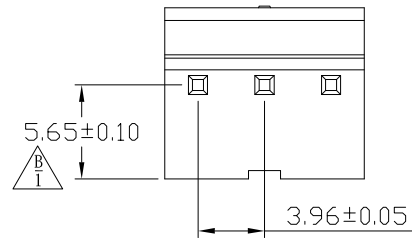

檢驗重點	尺寸公差
1	10.63±0.15
2	2.00±0.12
3	9.40±0.20

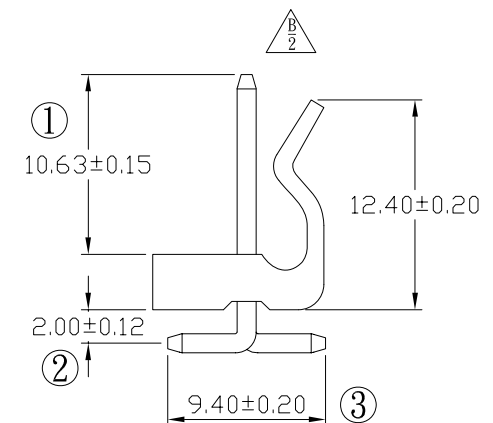

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

KK-VX-03R-LF
SERIES
LEADFREE
R TYPE FOOT
03 WAY
NON POST
180°SMT

DESCRIPTION: