

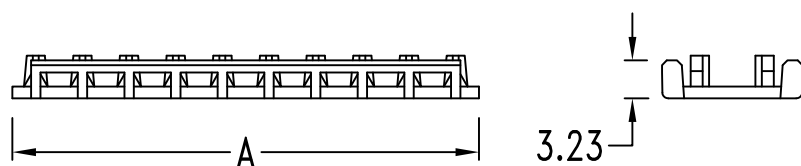
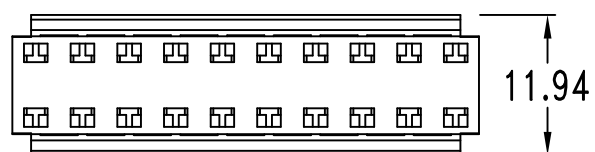


- △ • 2 ~ 20 circuits available
- Material: UL 94V-0 nylon 66
 - Color: White

KT-CC-xx

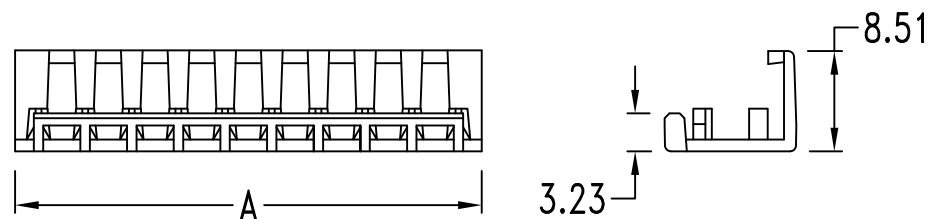

KT-CL-xx

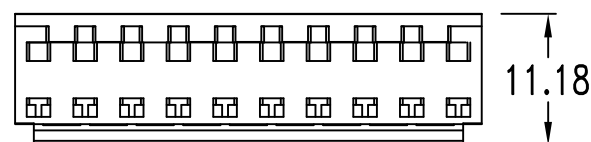

Dimensional Information - in (mm)

Circuits	Dim. A	Circuits	Dim. A	Circuits	Dim. A	Circuits	Dim. A	Circuits	Dim. A
2	7.92±0.10	6	23.76±0.20	10	39.60±0.25	14	55.44±0.30	18	71.28±0.35
3	11.88±0.15	7	27.72±0.20	11	43.56±0.25	15	59.40±0.30	19	75.24±0.35
4	15.84±0.15	8	31.68±0.20	12	47.52±0.25	16	63.36±0.30	20	79.20±0.35
5	19.80±0.15	9	35.64±0.20	13	51.48±0.30	17	67.32±0.30		

△

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.40
.XX ± 0.25
.XXX ± 0.08
ANG ±

PPOJECTION



ORDER INFORMATION

KT-Cx-xx-LF
SERIES
LEADFREE
02~20WAY
L: CLOSED END
C: FEED THROUGH
COVERH

DESCRIPTION: