


Material:

* Insulation: Glass filled polyester UL 94V-0
Color White(Nature)

* Contact: Brass

Plating option: $3.05 \mu\text{m}$ ($120 \mu''$) Min. Tin
over $0.76 \mu\text{m}$ ($30 \mu''$) Nickel

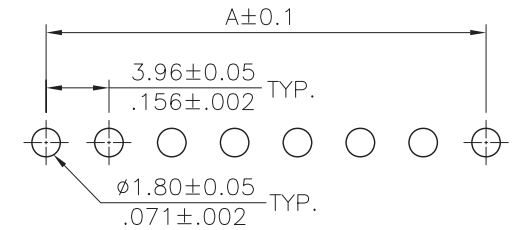

Recommended P.C. Board Layout

$A = 3.96 \times \text{No. of Spaces}$

$B = A + 3.96$

* Available in 2 through 24 circuits

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. \pm

CHECKED BY GENIUS

.X ± 0.38

UNIT / mm

SCALE 1 : 1

.XX ± 0.25

DATE

.XXX ± 0.10

ANG \pm

SIZE A4

PJECTION



ORDER INFORMATION

KT-DB-xx-LF
SERIES | LEADFREE
02~24WAY
BREAKAWAY
DIP 180°

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: